

Philips StyliD into Maxos

Installation instructions

Instructions de montage

Instrucciones de montaje

Kokoonpano- ja kiinnitysohjeet

Szerelési utasítások

Montageanleitung

Instrues de montagem

Montaj yönergesi

Návod k montáži

Montage instruktio

Monteringsinstruktioner

Οδηγίες εγκατάστασης

инструкция по монтажу

Instruzioni di montaggio


Monteringsvejledning

Instrukcja montazu

Návod k montáži



Type	DRIVER		P_{nom}	P_{max}	BEAM ANGLE MB
4MX960 1 ST540C LED25S/830 PSU MB WH	PSU	1,7	36W	38W	•
4MX960 2 ST540C LED25S/830 PSU MB WH	PSU	2,9	72W	76W	•
4MX960 1 ST550C LED39S/830 PSU MB WH	PSU	2,3	53W	56W	•
4MX960 2 ST550C LED39S/830 PSU MB WH	PSU	4,0	106W	112W	•

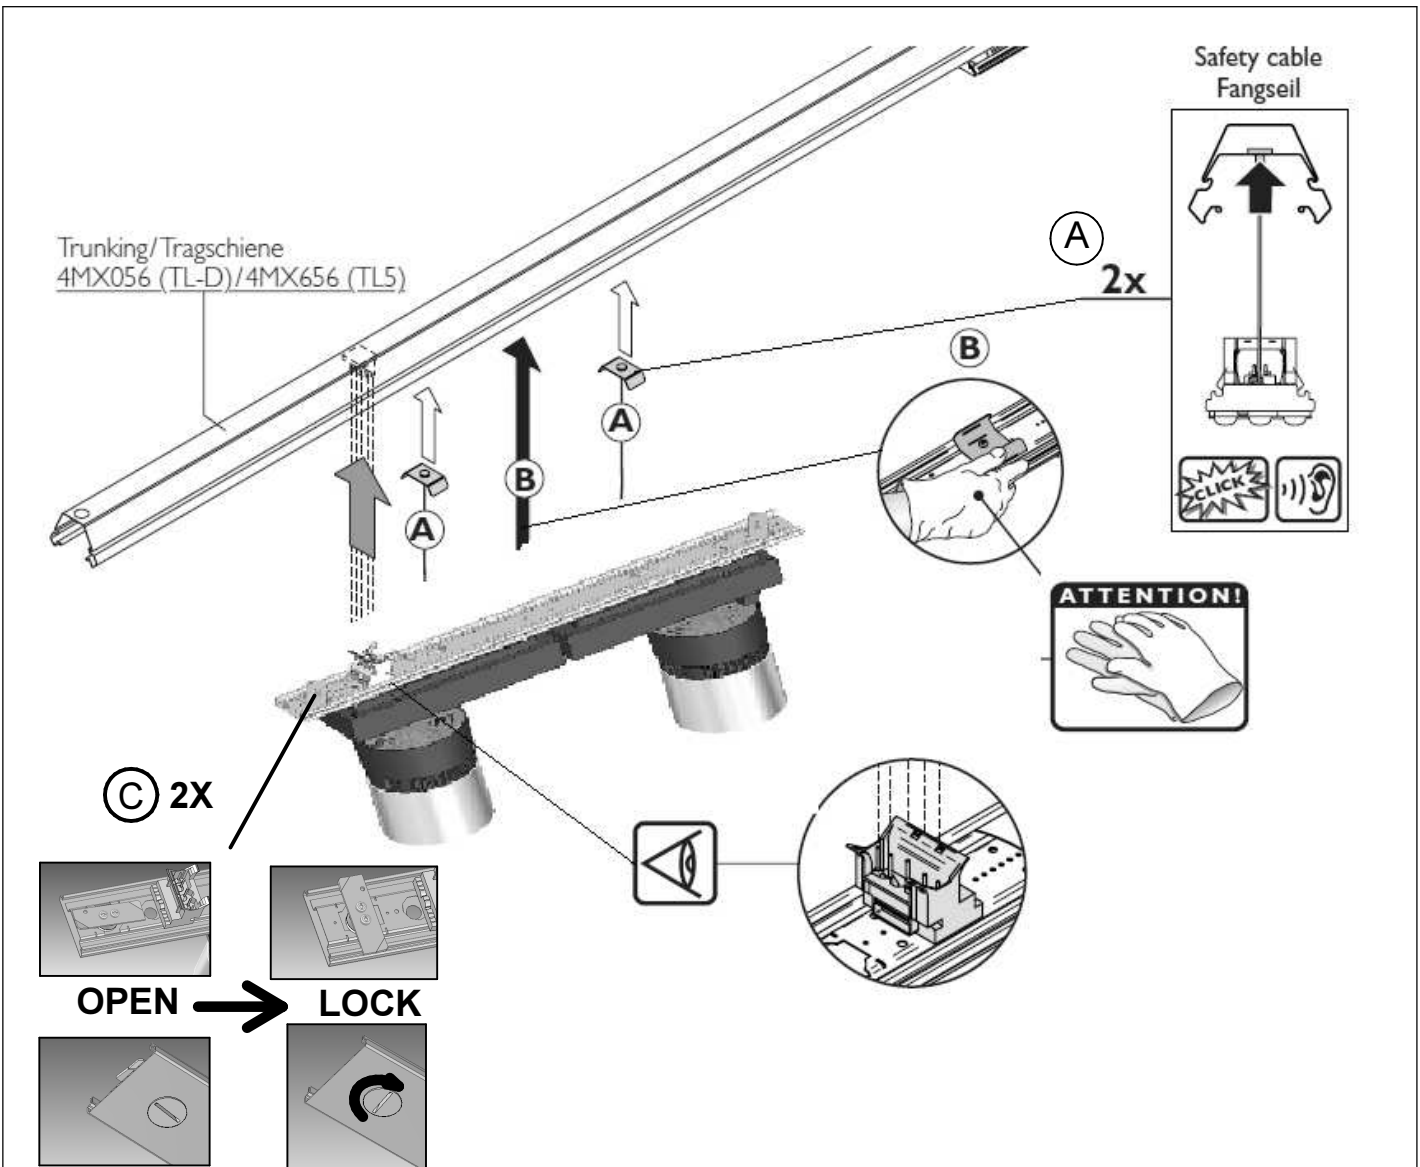


4443 160 04831

Version date : 09/05/2014

Data Subject to change without notice

Printed in EU

www.philips.com/lighting


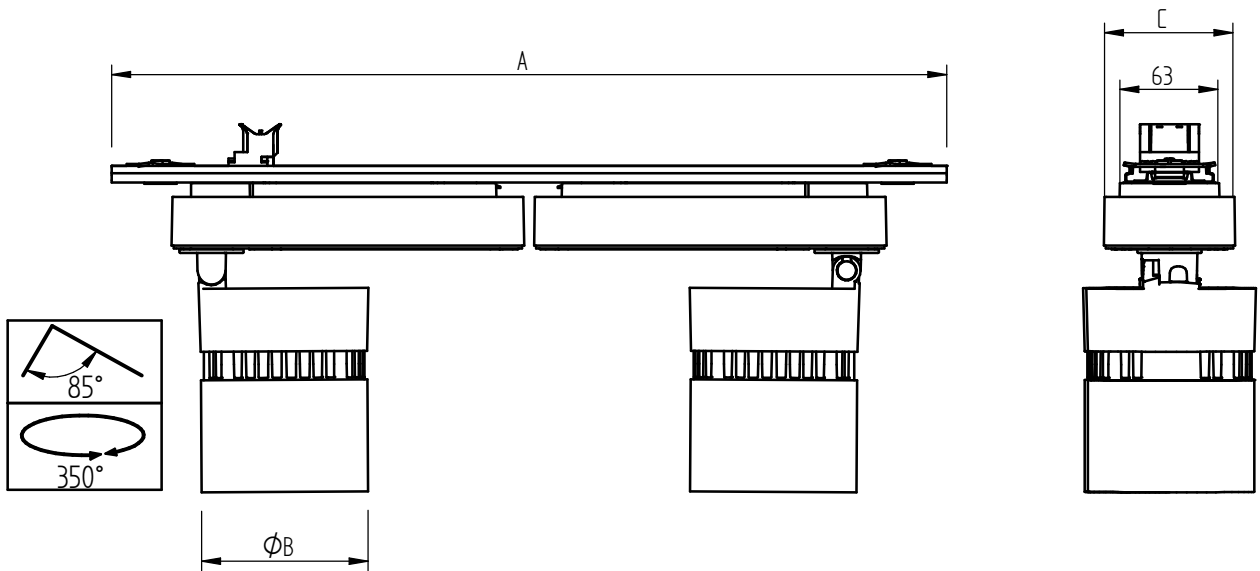


TYPE	A (mm)	B (mm)	C (mm)
4MX960 1 ST540C LED25S/830 PSU MB WH	600	Ø89	70
4MX960 2 ST540C LED25S/830 PSU MB WH			
4MX960 1 ST550C LED39S/830 PSU MB WH		Ø119	94
4MX960 2 ST550C LED39S/830 PSU MB WH			


1.

Suspension distances with coupling piece
Abhängeabstände mit Außenkupplung

X = 0,1 - 0,7 m

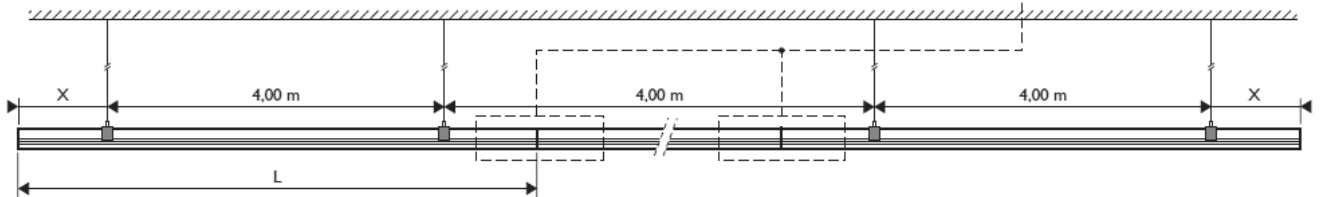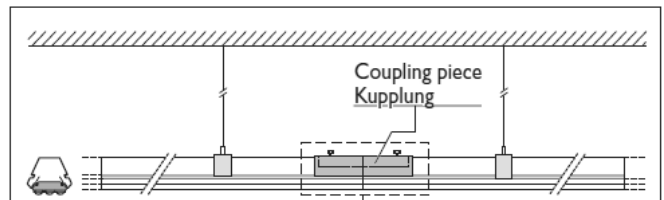



2.

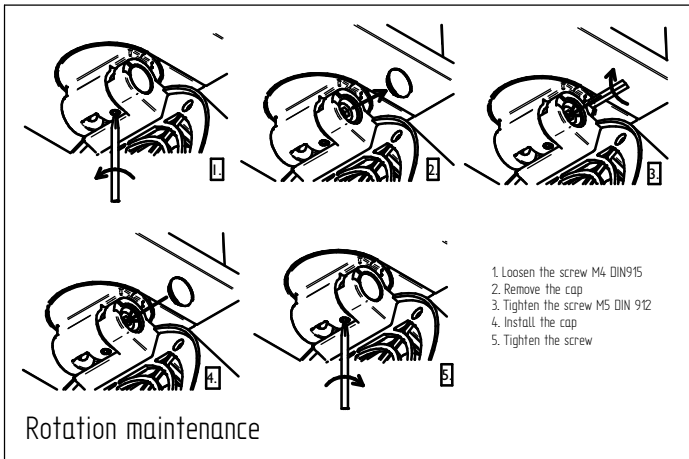

Rotation maintenance

1. Loosen the screw M4 DIN915
2. Remove the cap
3. Tighten the screw M5 DIN 912
4. Install the cap
5. Tighten the screw

Attention!
Please remove fixing part
before installation.
/only 4MX960 2 ST550C../

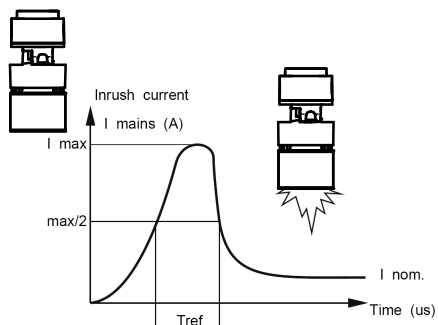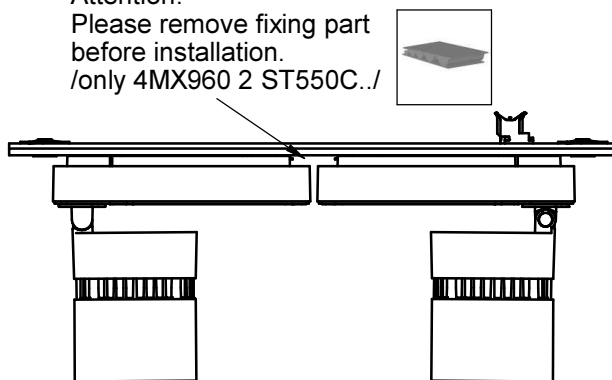

	4MX960 1 ST540C LED25S/830 PSU ...	4MX960 2 ST540C LED25S/830 PSU ...	4MX960 1 ST550C LED39S/830 PSU ...	4MX960 2 ST550C LED39S/830 PSU ...
Inom(A)	0,158	0,316	0,23	0,46
I max(A)	20	40	32	64
Tref(ms)	0,25	0,25	0,3	0,3
MCB	Max Products*			
B-10A	20	10	7	3
B-16A	32	16	12	6
C-10A	33	16	13	6
C-16A	54	27	22	11

*According to: IEC60555 test conditions