



Standard

STANDARD MAG BALLAST (1) FC8T9 & (1) FC12T9 120V

Available for many fluorescent lamp types sold today, including Preheat, Rapid Start, 2-pin CFL, Slimline, High Output, Very High Output and Circline. Magnetic ballasts can be used in any application where these lamps are used.

Product data

General Information			
Lamp Type	FC8T9 & FC12T9		
Number of Lamps	2 piece/unit		
Lamp Footage	-		
Ballast Type	Magnetic Fluorescent		
Base Model	RS2232TPW		
Suitable For Outdoor Use	Yes		
Automatic Restart	Yes		
Operating and Electrical			
Input Voltage	120 V		
Input Frequency	60 Hz		
Total Harmonic Distortion USA	15 %		
Ignition Method	Rapid Start		
Crestfactor (Nom)	1.7		
Ignition Time (Nom)	1 s		
Ballast Factor (Nom)	0.7		
Power Factor (Nom)	0.97		
Input Current (Nom)	0.4 A		
Input Power (Nom)	46 W		
Rated Lamp Power	22 & 32 W		

Wiring				
Wire Striplength	0.50/0.375 mm			
Lamp Connection	Series			
Wire Length by Color	See data sheet			
Wire Gauge (Nom)	18AWG mm			
Wire Type	Solid			
Remote Wiring Configuration Allowed	Yes			
Tandem Wiring Configuration Allowed	No			
Through Wiring Configuration Allowed	No			
Max Ballast-Lamp Distance Remote Wiring	30'			
Max Ballast-Lamp Distance Tandem Wiring	; -			
Max Ballast-Lamp Distance Through Wiring -				
Mechanical and Housing				
Housing Material	Metal			
Housing	T1			
Housing Dimensions	6.5" x 2.38" x 1.5"			
Approval and Application				
EMC Immunity Standard	FCC Non-Consumer			
Approval Marks	CSA certificate UL certificate RoHS			
	Compliant			
Hum And Noise Level	A			


Datasheet, 2019, March 22 data subject to change

Standard

UL Recognized	No
Product Data	
Order product name	STANDARD MAG BALLAST (1) FC8T9 & (1)
	FC12T9 120V
EAN/UPC - Product	781087043240
Order code	132043

Local order code	132043
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	913700501131
Net Weight (Piece)	1.139 kg

Dimensional drawing

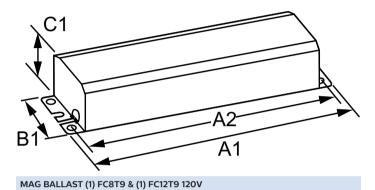

Product	A1	A2	B1	C1
STANDARD MAG BALLAST (1) FC8T9 & (1) FC12T9	6.5 in	6 in	2.38 in	1.5 in
120V				



© 2019 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. All trademarks are owned by Signify Holding or their respective owners.