



# Centium T8 Instant Start

## CENTIUM ELE BALLAST (3) F32T8 120-277V

Reliable and energy efficient Philips Advance's Centium commercial grade specifications, plus added benefits of lamp striation reduction technology.

### Product data


General information		Wiring	
Lamp Type	F32T8	Color Input Terminals	No terminals
Number of Lamps	2/3 piece/unit	Color Output Terminals	No terminals
Ballast Type	Electronic Fluorescent	Wire Striplength	0.50/0.375 mm
Base Model	ICN3P32N	Lamp Connection	Parallel
Suitable For Outdoor Use	Yes	Wire Length by Color	See data sheet
Automatic Restart	Yes	Wire Gauge (Nom)	18AWG mm
Operating and electrical		Wire Type	Solid
Input Voltage	120 to 277 V	Remote Wiring Configuration Allowed	Yes
Input Frequency	50 to 60 Hz	Tandem Wiring Configuration Allowed	Yes
Max THD	10 %	Through Wiring Configuration Allowed	Yes
Starting Method	Instant Start	Max Ballast-Lamp Distance Remote Wiring	ES = 6' / Standard = 20'
Lamp Current Crest Factor (Nom)	1.7	Max Ballast-Lamp Distance Tandem Wiring	ES = 6' / Standard = 20'
Ignition Time (Nom)	0.1 s	Max Ballast-Lamp Distance Through Wiring	ES = 6' / Standard = 20'
Ballast Factor (Nom)	0.88	Connector Type	No connector
Power Factor (Nom)	0.98	Temperature	
Input Current (Operating) (Max)	0.71 A	T-Case Maximum (Nom)	158 °F
Input Current (Operating) (Min)	0.31 A	Mechanical and housing	
Input Power (Nom)	85-86 W	Housing Material	Metal
Rated Lamp Watts	32 W	Housing	N

## Centium T8 Instant Start

Housing Dimensions	9.5" x 1.3" x 1.0"
<b>Approval and application</b>	
EMC Immunity Standard	FCC Non-Consumer
Approbation Marks	CSA certificate UL certificate CEC Listing
	CEE Rated NEMA Premium NOM certificate
	RoHS Compliant
Sound Rating	A
UL Recognized	No

<b>Product data</b>	
Order product name	CENTIUM ELE BALLAST (3) F32T8 120-277V
EAN/UPC - Product	781087091494
Order code	ICN3P32N35I
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	913701220201
Copy Net Weight (Piece)	0.972 lb

### Dimensional drawing

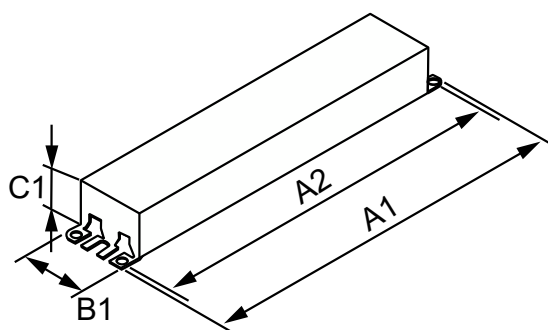

CENTIUM ELE BALLAST (3) F32T8 120-277V

#### Product

CENTIUM ELE BALLAST (3) F32T8 120-277V

