



MASTER TL-D Secura

MASTER TL-D Secura 36W/840 1SL/25

Low-pressure mercury discharge lamps with a tubular 26 mm envelope

Product data

General Information	
Cap base	G13 [Medium Bi-Pin Fluorescent]
Life to 10% failures (nom.)	12000 h
Life to 50% failures (nom.)	15000 h
Life to 50% failures preheat (nom.)	20000 h
LSF 2000 h Rated	99 %
LSF 4000 h Rated	99 %
LSF 6000 h Rated	99 %
LSF 8000 h Rated	99 %
LSF 12000 h Rated	89 %
LSF 16000 h Rated	33 %
LSF 20000 h Rated	2 %

Light Technical	
Colour code	840 [CCT of 4,000 K]
Luminous flux (nom.)	3200 lm
Luminous flux (rated) (nom.)	3200 lm
Colour designation	Cool White (CW)
Correlated colour temperature (nom.)	4000 K
Luminous efficacy (rated) (nom.)	89 lm/W
Color rendering index (nom.)	85
LLMF 2000 h Rated	96 %
LLMF 4000 h Rated	95 %
LLMF 6000 h Rated	94 %
LLMF 8000 h Rated	93 %
LLMF 12000 h Rated	92 %

LLMF 16000 h Rated	91 %
LLMF 20000 h Rated	90 %

Operating and Electrical	
Power (Rated) (Nom)	36.0 W
Lamp current (nom.)	0.440 A

Temperature	
Design temperature (nom.)	25 °C

Controls and Dimming	
Dimmable	yes

Approval and Application	
Energy efficiency label (EEL)	A
Mercury (Hg) content (nom.)	2.0 mg
Energy Consumption kWh/1000 h	42 kWh

UV	
Damage factor D/fc (nom.)	0.13

Product Data	
Full product code	871150064014740
Order product name	MASTER TL-D Secura 36W/840 SLV/25
EAN/UPC – product	8711500640147
Order code	64014740

MASTER TL-D Secura


Numerator – quantity per pack	1
Numerator – packs per outer box	25
Material no. (12NC)	927921484076
Net weight (piece)	195.500 g

ILCOS Code	FD-36/40/1B-E-G13
------------	-------------------

Warnings and Safety

- Not suitable for closed luminaires (as indicated by two blue rings)
- Recommended use in combination with self-stopping lamp control system
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- It's strongly recommended to replace Secura lamps before or at the moment the specified lamp life (50% failures @ 3 hrs switching cycle) is reached.



Dimensional drawing



Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL-D Secura 36W/840 SLV/25	28 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm

TL-D 36W/840 Secura

Photometric data

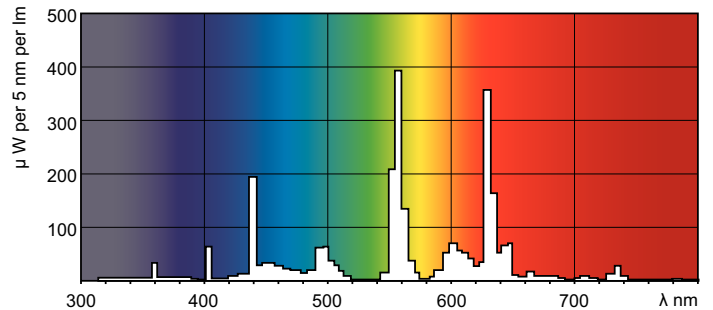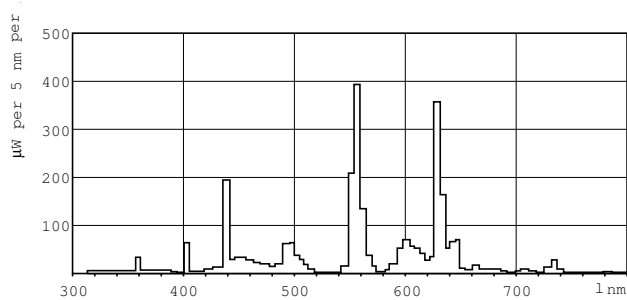

Lightcolour Secura /840

Lightcolour Secura /840

MASTER TL-D Secura

Lifetime

