

# PHILIPS

# Lighting



## MASTER MHN-LA

### MASTER MHN-LA 1000W/956 230V XWH

Compact quartz metal halide lamps with double-pin

#### Product data

General Information	
Cap base	X528 [ X528]
Burning Position	P5 [ Parallel +/-5D or Horizontal(HOR)]
Life to 5% failures (nom.)	6000 h
Life to 10% failures (nom.)	8000 h
Life to 20% failures (nom.)	10000 h
Life to 50% failures (nom.)	15000 h
Light Technical	
Colour Code	956 [ CCT of 5,600 K]
Lamp Luminous Flux (Min)	82000 lm
Lamp Luminous Flux (Nom)	87000 lm
Colour Designation	Daylight
Lumen maintenance 1,000 hours (nom.)	90 %
Lumen maintenance 2,000 hours (nom.)	80 %
Chromaticity coordinate X (nom.)	337
Chromaticity coordinate Y (nom.)	331
Colour Temperature, horizontal (Nom)	5600 K
Lamp Luminous Efficacy EM (Nom)	86.0 lm/W
Colour Rendering Index,horiz (Nom)	80
Operating and Electrical	
Lamp supply voltage	230 V [ 230]
Power (Rated) (Nom)	1040.0 W
Lamp current run-up (max.)	15 A
Lamp current (EM) (nom.)	9.3 A

Ignition supply voltage (min.)	198 V
Voltage (Max)	140 V
Voltage (Min)	110 V
Voltage (Nom)	125 V
Controls and Dimming	
Dimmable	no
Mechanical and Housing	
Bulb finish	Clear (CL)
Cap base information	Cable (C)
Approval and Application	
Energy efficiency label (EEL)	A
Mercury (Hg) content (nom.)	95 mg
Energy Consumption kWh/1000 h	1144 kWh
UV	
Specific eff. radiant power	270 mW/klm
Luminaire Design Requirements	
Bulb temperature (max.)	920 °C
Pinch temperature (max.)	350 °C
Product Data	
Full product code	871150020077800

# MASTER MHN-LA


Order product name	MASTER MHN-LA 1000W/956 230V XWH
EAN/UPC – product	8718291548218
Order code	928072205130
Numerator – quantity per pack	1
Numerator – packs per outer box	1

Material no. (12NC)	928072205130
Net weight (piece)	132.000 g
ILCOS Code	MN-1000-E-K-/H

## Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


## Dimensional drawing

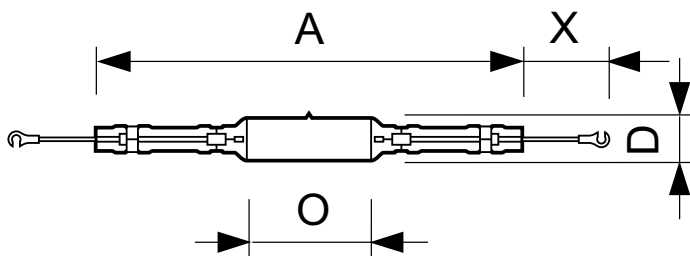

Product	D (max)	O	X	A
MASTER MHN-LA 1000W/956 230V XWH	40 mm	40.5 mm	35 mm	286 mm

## MHN-LA 1000W/956 230V XWH

## Photometric data

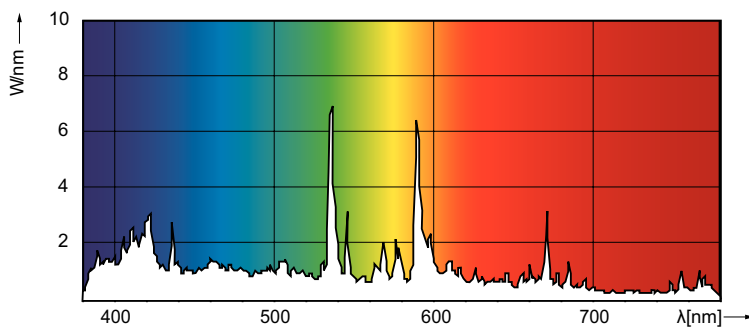

# MASTER MHN-LA

## Lifetime

