

PHILIPS

sense and simplicity

INSTALLATION INSTRUCTIONS FOR


335 (535) LEXAN® SHIELD and

330 (530) WIRE GUARD



Listed For
Wet Locations

READ INSTRUCTIONS CAREFULLY BEFORE ATTEMPTING TO INSTALL LEXAN® SHIELD AND/OR WIRE GUARD TO WALL PRISM. RETAIN INSTRUCTIONS FOR FUTURE REFERENCE.

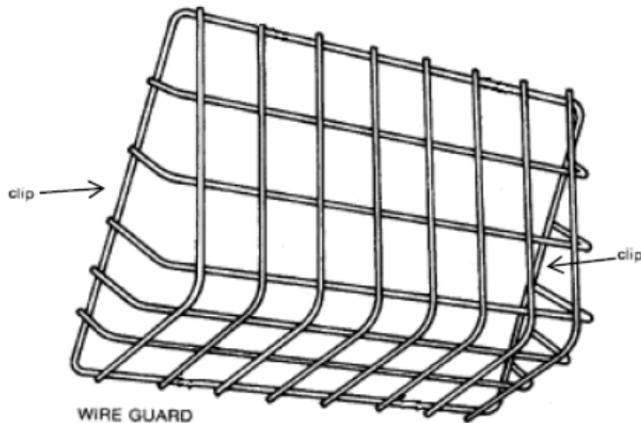

WIRE GUARD

Specifications

Shipping weight 2.00 lbs.

Approval U.L. listed

LIMITED ONE YEAR WARRANTY

Fixtures are guaranteed against mechanical and electrical defects for a period of one year from date of delivery. Replacement or repair of authorized returns found to be mechanically or electrically defective within the guarantee period constitutes fulfillment of all obligations under this warranty. We assume no responsibility for the improper installation of our products, or for labor costs involved in repair or replacement. Ballasts and lamps are covered by manufacturers trade warranties. Full statement of limited warranty policy available on request.

General Safety Information

WARNING: DO NOT HANDLE AN ENERGIZED FIXTURE OR ENERGIZE ANY FIXTURE WITH WET HANDS OR WHEN STANDING ON A WET OR DAMP SURFACE, OR IN WATER.

1. This fixture must be wired in accordance with all electrical and safety codes and ordinances, the most recent National Electric Code (NEC), and the Occupational Safety and Health Act (OSHA).
2. All wiring should be performed by a qualified electrician.
3. Make certain that the power source conforms to the requirements of this fixture.
4. This fixture must be properly grounded for your protection against fatal shock hazards and to assure safe operation. Fixture housing must be grounded with either grounding wire or metal conduit. If grounding wire is to be attached to fixture housing, the green (or green and yellow) conductor is the grounding wire.

WARNING: NEVER CONNECT THE GREEN (OR GREEN AND YELLOW) WIRE TO A LIVE TERMINAL!

If not attached to a grounding wire, this electric light fixture must be properly connected to a grounded metal raceway system or grounded metal water pipe by means of a separate grounding wire connected to bare metal or to a screw located inside the light fixture or other suitable means. Refer to the most recent NEC Articles 250 (Grounding) and 410 (Lighting Fixtures, Lampholders, Lamps, Receptacles and Rosettes) for additional information. ALL WIRING SHOULD BE DONE BY A QUALIFIED ELECTRICIAN.

WARNING: DO NOT USE IN FLAMMABLE OR EXPLOSIVE ATMOSPHERES, OR IN SHOWERS AND SAUNAS.

Installation

CAUTION: Keep space between Wall Prism and Lexan® Shield and/or Wire Guard. When installing both Lexan® Shield and Wire Guard together, install shield first, then wire guard. Do not over tighten screws.

1. Remove rubber plugs (2) located in the side holes of the lens frame.
2. Position Lexan® Shield or Wire Guard or both over the holes in the lens frame.
3. Install (2) thread forming mounting screws (supplied) and tighten securely (DO NOT OVER TIGHTEN).



© 2016 Philips Lighting Holding B.V. All rights reserved.
www.philips.com/luminaires

443561067900 Rev. A
Page 1 of 1

Philips Lighting North America
Corporation
200 Franklin Square Drive,
Somerset, NJ 08873, USA

Philips Lighting Canada Ltd.
281 Hillmount Road,
Markham, ON, Canada L6C 2S3