



Office Lum/LED办公灯具

RC600B



Installation instruction/安装说明书




	Pmax.(W)	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)		ActiLume Controler
RC600B/LED31S/W60L60	38	597	597	75	70	566	566	5.7	No
RC600B/LED40S/W60L60	45	597	597	75	70	566	566	5.7	No
RC600B/LED31S/ACL/W60L60	38	597	597	75	70	566	566	5.7	Yes
RC600B/LED40S/ACL/W60L60	45	597	597	75	70	566	566	5.7	Yes
RC600B/LED31S/W60L120	38	1197	297	75	70	1166	266	5.8	No
RC600B/LED40S/W60L120	45	1197	297	75	70	1166	266	5.8	No
RC600B/LED31S/ACL/W60L120	38	1197	297	75	70	1166	266	5.8	Yes
RC600B/LED40S/ACL/W60L120	45	1197	297	75	70	1166	266	5.8	Yes

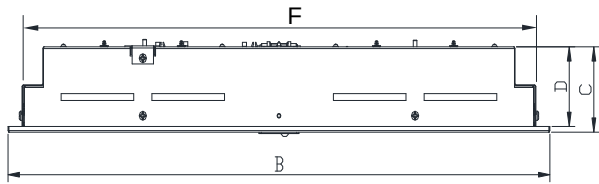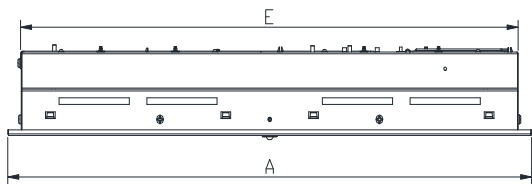


Appearance/外观

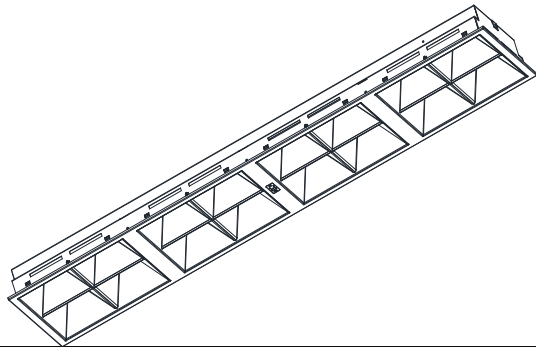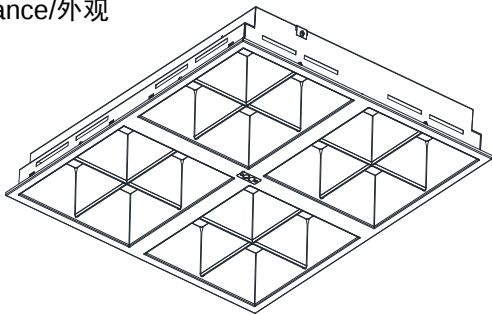


Suspension via hook/钩式悬挂安装

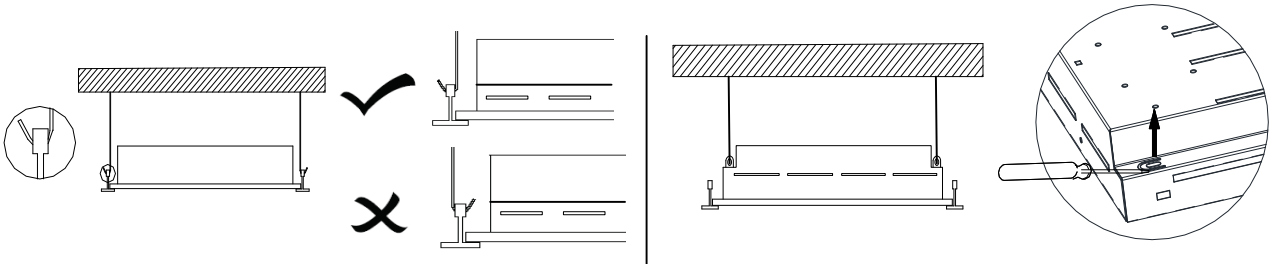


1

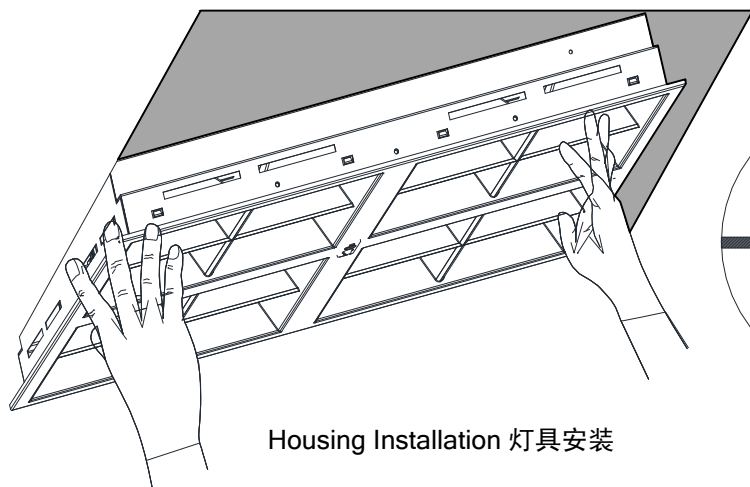





Housing Installation 灯具安装

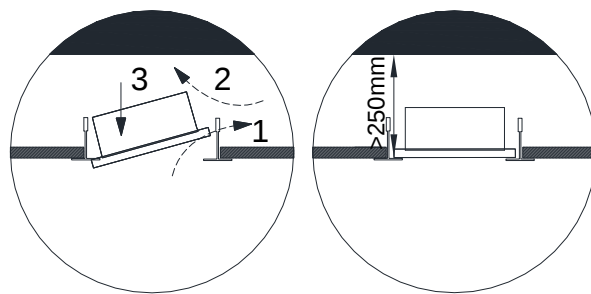

2

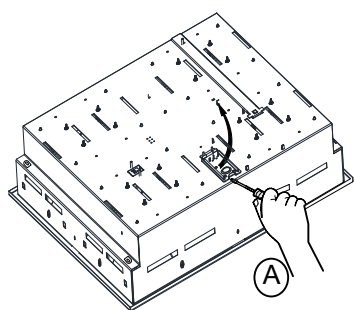

Connect entry cable/连接电源线

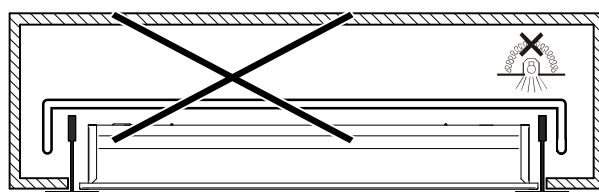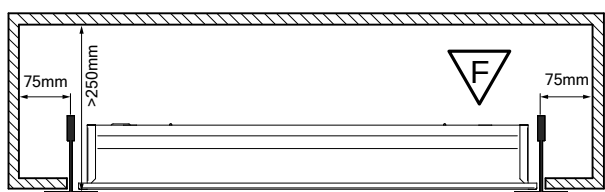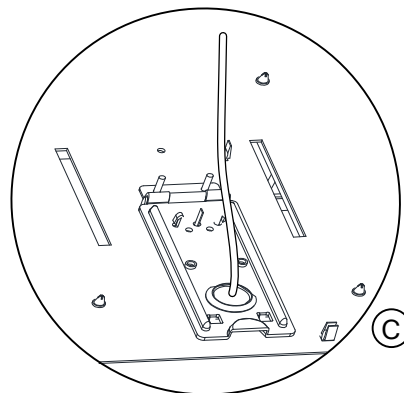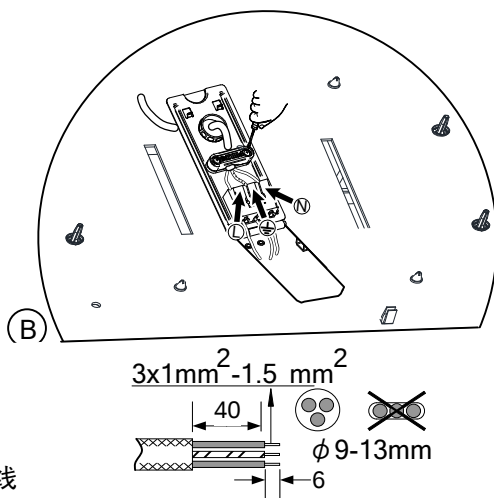

- 1、 The luminaire shall be installed by a qualified electrician and wired in accordance with the latest IEE electrical regulations or the national requirements
灯具应由有资格的电工安装，接线要符合IEE 电气标准或国家标准。
- 2、 Do not switch on before complete installation.
接线过程中，切勿通电。
- 3、 The luminaire shall ,under no circumstance,be covered with insulation matting or similar material.
灯具不适合被隔热衬垫或类似材料覆盖。
- 4、 The luminaire is suitable for direct mounting or normally flammable material.
灯具适合于直接安装在普通可燃材料表面。