



TTX400 TL-D, trunking sections

TTX400 583 5

This trunking system comprises prewired sections (TTX400) and optional unwired sections (TTX410). The sections can be easily clicked together using the integrated electrical/mechanical coupling pieces. The trunking is available with a complete range of interchangeable components to offer outstanding flexibility. All the trunking sections are made of white prelaquered steel. Round edges reduce the risk of injury. Flat-ribbon cable (5 or 7 wires), an integrated phase-selection switch and contact blocks with click connection make electrical and mains connection quick, simple and safe (if 3 phases are used equalised, the maximum current is 16 A). The stability of the sections and coupling pieces limits the number of mounting brackets needed (max. 3 metres when using 583 trunking sections). The electrical unit is simply clicked into the trunking for both mechanical and electrical connection. The prewired section TTX400 is equipped standard with a 5- or 7-wire 2.5 mm² ribbon cable. The 7-wire flat ribbon cable is used especially for the integration of the light regulation or emergency lighting functions. Hence, no extra contact blocks or wiring need to be installed. Available in lengths of 1, 2 and 3 electrical units of 36 and 58 W. It is also available in 9 wires (7-wire flat-ribbon plus 2 additional low-voltage cables for dimming) for the integration of light regulation and emergency lighting functions. The new optimized and recommended solution, instead of TTX400 9, consists of the standard TTX400 7-wire flat-ribbon and the new electrical units TMX400 C-2R. TTX400 is also available with a 5-wire 1.5 mm² ribbon cable, in lengths of 1, 2, 3 electrical units of 36 and 58 W; to be used in combination with HFP units or conventional units.

Product data


General Information		Gear	
Lamp family code	TL-D [MASTER TL-D]		-

TTX400 TL-D, trunking sections

Operating and Electrical	
Connection	-
Mechanical and Housing	
Overall length	4,586 mm
Approval and Application	
Ingress protection code	IP20 [Finger-protected]
Protection class IEC	Safety class I
Product Data	
Order product name	TTX400 583 5

Full product name	TTX400 583 5
Full product code	871155909349999
Order code	910400644418
Material Nr. (12NC)	910400644418
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8711559093499
Numerator - Packs per outer box	2
EAN/UPC - Case	8711559093505

Dimensional drawing

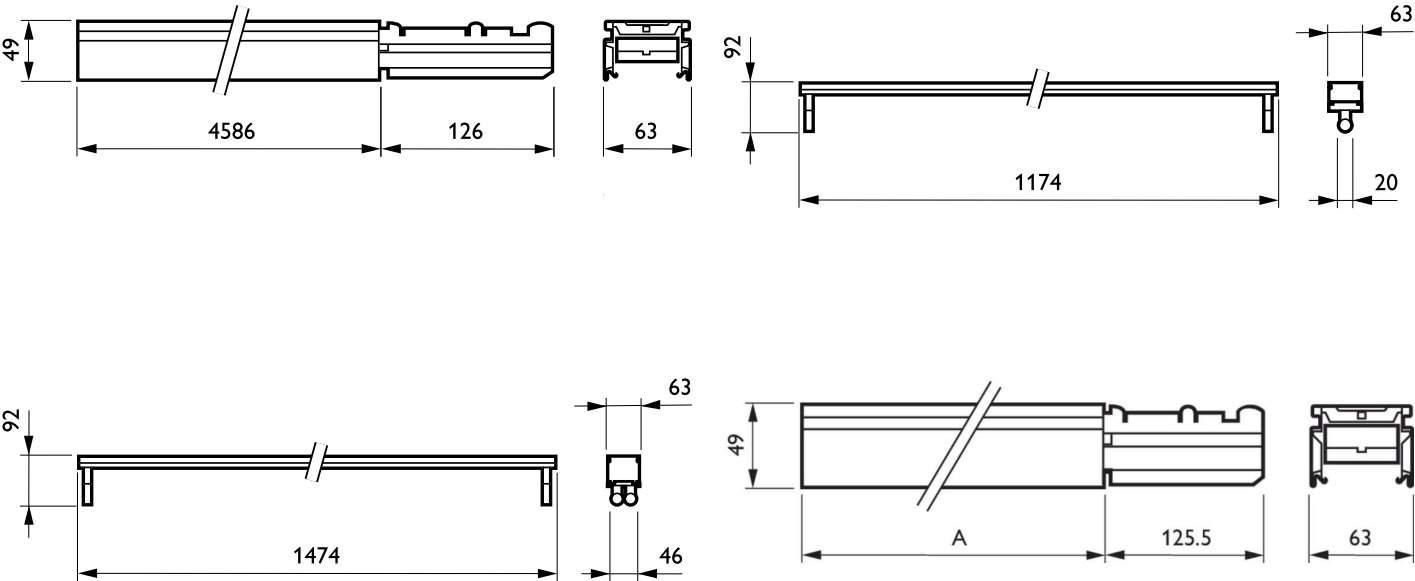

Product
TTX400 583 5

TTX400 TL-D, trunking sections

