



TMS028

TMS028 2xTL-D36W HFS

TMS028, 2, MASTER TL-D, 36 W, HF Standard

TMS028 is a basic batten for 1 or 2 TL-D fluorescent lamps and includes optics for general lighting. It can be suspended or surface-mounted. A lamellae louver, end caps and inline couplers are available as accessories. The repositionable contact block enables flexible connection (with cable entry centrally or via the end caps).


Product data

General Information	
Lamp family code	TL-D [MASTER TL-D]
Gear	HFS [HF Standard]
Feed-through wiring	-
Product family code	TMS028 [TMS028]
CE mark	Yes
Flammability mark	For mounting on normally flammable surfaces
ENEC mark	ENEC mark
Glow-wire test	Temperature 850 °C, duration 5 s
Light Technical	
Number of light sources	2
Operating and Electrical	
Input Voltage	220 to 240 V
Power Consumption	36 W
Connection	-
Mechanical and Housing	
Fixation point length distance (Nom)	960 mm
Overall length	1,232 mm

Approval and Application	
Ingress protection code	IP20 [Finger-protected]
Protection class IEC	Safety class I
Application Conditions	
Suitable for random switching	Not applicable
Product Data	
Order product name	TMS028 2xTL-D36W HFS
Full product name	TMS028 2xTL-D36W HFS
Full product code	871155913554000
Order code	13554000
Material Nr. (12NC)	910402217103
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8711559135540
Numerator - Packs per outer box	1
EAN/UPC - Case	8711559135540

TMS028

Dimensional drawing

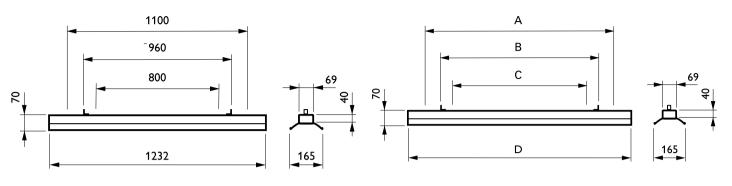

Product TMS028 2xTL-D36W HFS



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2023, April 29 - data subject to change