



Pacific TCW215

TCW215 2xTL-D36W HFS PI

PACIFIC, 2, MASTER TL-D, 36 W, HF Performer, Push-in connector 3-pole

Pacific TCW215 is a functional dust- and jetproof luminaire for TL-D fluorescent lamps. The cover is fixed to the housing by means of an innovative concept using integrated fixing points to avoid external lockers. There is a choice of different standard versions available. The luminaire can be mounted individually or in-line, with easy 'click' installation. Flexibility is ensured with a choice of fixing points and different cable entries. The TCW215 can also be suspended from Philips TTX410 light-line systems.

Product data

General Information	
Lamp family code	TL-D [MASTER TL-D]
Gear	HFP [HF Performer]
Feed-through wiring	-
Product family code	TCW215 [PACIFIC]
CE mark	Yes
Flammability mark	For mounting on normally flammable surfaces
ENEC mark	ENEC mark
Glow-wire test	Temperature 650 °C, duration 5 s
Light Technical	
Number of light sources	2
Operating and Electrical	
Input Voltage	220 to 240 V
Power Consumption	36 W


Connection	Push-in connector 3-pole
Cable	-
Temperature	
Ambient temperature range	-15 to +35 °C
Mechanical and Housing	
Housing Material	Polyester
Fixation point length distance (Nom)	600 mm
Overall length	1,300 mm
Approval and Application	
Ingress protection code	IP66 [Dust penetration-protected, jet-proof]
Mech. impact protection code	IK02 [0.2 J standard]
Protection class IEC	Safety class I

Pacific TCW215

Application Conditions	
Suitable for random switching	Not applicable
Product Data	
Order product name	TCW215 2xTL-D36W HFS PI
Full product name	TCW215 2xTL-D36W HFS PI
Full product code	871155929174100
Order code	910402602118

Material Nr. (12NC)	910402602118
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8711559291741
Numerator - Packs per outer box	1
EAN/UPC - Case	8711559291741

Dimensional drawing

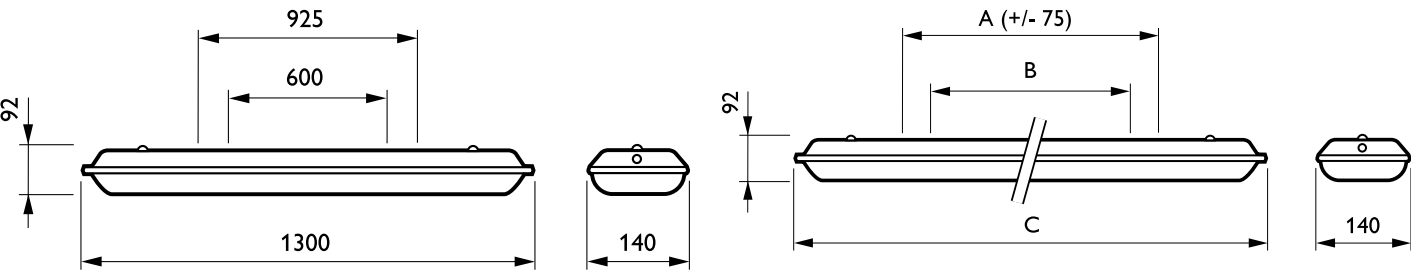

Product	A	B	C
TCW215 2xTL-D36W HFS PI	850 mm	600 mm	1,300 mm

