



Pacific TCW216

TCW216 1xTL-D36W HFS PI

PACIFIC, 1, MASTER TL-D, 36 W, HF Performer

Pacific TCW216 is a functional dust-, jet-, shock- and vandalproof luminaire, and can accommodate both TL-D and TL5 (16 mm) fluorescent lamps. The cover is fixed to the housing by means of an innovative concept using integrated fixing points to avoid external lockers. There is a choice of different standard versions available. The luminaire can be mounted individually or in-line with easy 'click' installation. Flexibility is ensured with a choice of fixing points and different cable entries. The TCW216 can also be suspended from Philips TTX410 light-line systems.

Product data

General Information	
Lamp family code	TL-D [MASTER TL-D]
Light source replaceable	Yes
Gear	HFP [HF Performer]
Driver included	Yes
Feed-through wiring	-
Product family code	TCW216 [PACIFIC]
Explosion hazard class	-
CE mark	Yes
Flammability mark	For mounting on normally flammable surfaces
ENEC mark	ENEC mark
Glow-wire test	Temperature 850 °C, duration 5 s
Light Technical	
Number of light sources	1
Optic type	-


Operating and Electrical	
Input Voltage	220 to 240 V
Power Consumption	36 W
Connection	Push-in connector 3-pole
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Housing Material	Polyester
Fixation point length distance (Nom)	600 mm
Overall length	1,300 mm
Approval and Application	
Ingress protection code	IP66 [Dust penetration-protected, jet-proof]
Mech. impact protection code	IK08 [5 J vandal-protected]
Protection class IEC	Safety class I

Pacific TCW216

Application Conditions	
Suitable for random switching	Not applicable
Product Data	
Order product name	TCW216 1xTL-D36W HFS PI
Full product name	TCW216 1xTL-D36W HFS PI
Full product code	871155929185700
Order code	910402607018

Material Nr. (12NC)	910402607018
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8711559291857
Numerator - Packs per outer box	1
EAN/UPC - Case	8711559291857

Dimensional drawing

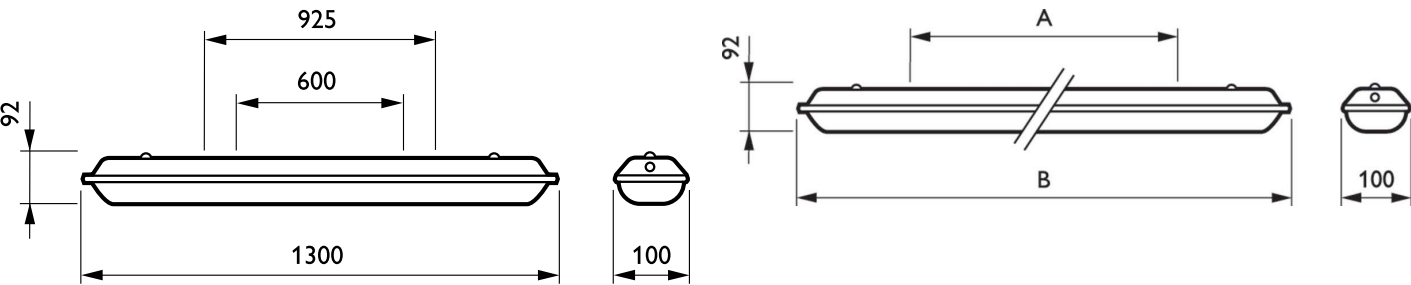

Product	A	B
TCW216 1xTL-D36W HFS PI	925 mm	1,300 mm

