

# SmartForm TBS417

## TBS417 1x28W/840 HFP C8 PIP

SmartForm recessed semi-modular, 1, 28 W, 840 neutral white, HF Performer, High-gloss optic 3D micro-lamellae, Push-in connector and pull relief

Reflecting Philips' drive for simplicity and sustainability, SmartForm recessed is a complete family of highly versatile modular and semi-modular luminaires. These luminaires are available with a choice of LED or MASTER TL5 light sources in very small, slender versions. Designed to fit in a wide range of ceiling types, this complete family can fulfill the majority of project requirements in most applications. Energy efficiency. As well as incorporating energy-efficient LED or TL5 light sources and a range of Philips electronic ballasts, the SmartForm recessed family can be equipped with lighting controls for presence detection and daylight regulation (ActiLume) or daylight regulation only (Luxsense) in order to reduce energy consumption (W/m<sup>2</sup> is very low). In this way, this Green Flagship range also reduces the overall cost of ownership as well as CO<sub>2</sub> levels, making SmartForm an environmentally friendly choice. SmartForm recessed TBS417 – 'light line beam'. Slender SmartForm recessed continuous light-line luminaires are designed for integration in linear exposed T-bar and plaster ceilings. 'Light line beam' TBS417 1-lamp. Continuous light line for micro-optics, asymmetrical optic and rimless MLO and Opal covers. All versions TL5: 14/24 W; 21/39 W; 28/54 W; 35/49/80 W. Luminaire width is 90 mm. 'Light line beam' TBS417 2-lamps. Continuous light line for mini-optics, 2-lamps. All versions TL5: 14/24 W; 21/39 W; 28/54 W; 35/49/80 W. Luminaire width is 115 mm.

### Product data


General Information		Product family code	TBS417 [SmartForm recessed semi-modular]
Lamp family code	TL5 [TL5]	Embedded control	-
Gear	HFP [HF Performer]	CE mark	Yes
Feed-through wiring	-		

SmartForm TBS417

Glow-wire test	Temperature 850 °C, duration 5 s
Light Technical	
Number of light sources	1
Light source color	840 neutral white
Optic type	High-gloss optic 3D micro-lamellae
Optical cover type	-
Operating and Electrical	
Input Voltage	220 to 240 V
Power Consumption	28 W
Connection	Push-in connector and pull relief
Cable	-
Mechanical and Housing	
Housing Color	White
Overall length	1,208 mm
Approval and Application	
Ingress protection code	IP20 [Finger-protected]

Mech. impact protection code	IK02 [0.2 J standard]
Protection class IEC	Safety class I
Application Conditions	
Suitable for random switching	Not applicable
Product Data	
Order product name	TBS417 1x28W/840 HFP C8 PIP
Full product name	TBS417 1x28W/840 HFP C8 PIP
Full product code	871794398771900
Order code	910501898303
Material Nr. (12NC)	910501898303
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8717943987719
Numerator - Packs per outer box	1
EAN/UPC - Case	8717943987719

Dimensional drawing

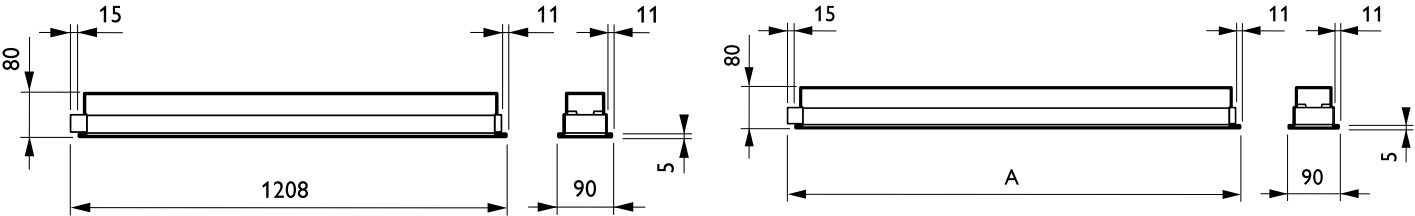

Product	A
TBS417 1x28W/840 HFP C8 PIP	1,208 mm

