

# Maxos LED, recessed

## RC302B 1xLED10S/840 PSU W

Maxos Recessed LED, 1, LED Module, system flux 1000 lm, 840 neutral white, Power supply unit (On/Off), Plug-in connector 3-pole Wieland/Adels compatible

Maxos LED Recessed is a semi-modular recessed LED luminaire for shelf and gondola lighting. Thanks to its adjustable optic, the light can be aimed precisely at the products on the shelves or at signage. The dedicated beam shape results in maximum visibility of the merchandise on display and less spill light. The individual LEDs are shielded by anti-glare optics, thus ensuring visual comfort and creating an innovative 'light line' appearance. The luminaire's astonishing system efficiency, combined with its maintenance-free operation and absence of hazardous materials, make it a truly green product. Maxos LED Recessed fits any shop floor layout. No additional ceiling profile is required: the ceiling tile can be laid directly on the flat luminaire rim, reducing installation time and material usage.

### Product data

General Information			
Lamp family code	LED10S [LED Module, system flux 1000 lm]		useful life (B50) value also represents the B10 value.
Light source replaceable	No	Product family code	RC300B [Maxos Recessed LED]
Number of gear units	Unit	Lighting Technology	LED
Driver included	Yes	CE mark	Yes
Remarks	*- According to the Lighting Europe guidance paper 'Evaluating performance of LED based luminaires – January 2018': statistically there is no relevant difference in lumen maintenance between the B50 and, for example, the B10. Therefore, the median	Warranty period	5 years
		Flammability mark	For mounting on normally flammable surfaces
		ENEC mark	ENEC plus mark
		Glow-wire test	Temperature 650 °C, duration 5 s
		EU RoHS compliant	Yes

## Maxos LED, recessed

<b>Light Technical</b>	
Luminous Flux	1,300 lm
Correlated Colour Temperature	4000 K
Luminous efficacy (rated) (nom.)	110 lm/W
Colour rendering index (CRI)	≥80
Number of light sources	1
Light source colour	840 neutral white
Optic type	-
Optical cover type	Polymethyl methacrylate bowl/cover
Luminaire light beam spread	70°
Unified Glare Rating (CEN)	Not applicable

<b>Operating and Electrical</b>	
Input Voltage	220-240 V
Line Frequency	50 to 60 Hz
Inrush current	16 A
Inrush time	0.220 ms
Power Consumption	11.8 W
Power Factor (Fraction)	0.9
Connection	Plug-in connector 3-pole Wieland/Adels compatible
Cable	-
Number of products on MCB of 16 A type B	28

<b>Temperature</b>	
Ambient temperature range	+10 to +40 °C

<b>Controls and Dimming</b>	
Dimmable	No
Driver/power unit/transformer	Power supply unit (On/Off)
Constant light output	No

<b>Mechanical and Housing</b>	
Housing material	Steel
Reflector material	Aluminium

Optic material	-
Optical cover/lens material	Polymethyl methacrylate
Fixation material	-
Housing Colour	White
Optical cover/lens finish	Ribbed
Overall length	622 mm
Overall width	103 mm
Overall height	130 mm
Dimensions (height x width x depth)	130 x 103 x 622 mm


<b>Approval and Application</b>	
Ingress protection code	IP40 [Wire-protected]
Mech. impact protection code	IK02 [0.2 J standard]
Protection class IEC	Safety class I

<b>Initial Performance (IEC Compliant)</b>	
Luminous flux tolerance	+/-10%
Initial chromaticity	(0.38, 0.38) SDCM <3
Power consumption tolerance	+/-10%

<b>Application Conditions</b>	
Performance ambient temperature Tq	25 °C
Suitable for random switching	No

<b>Product Data</b>	
Order product name	RC302B 1xLED10S/840 PSU W
Full product name	RC302B 1xLED10S/840 PSU W
Full EOC	871794391358900
Order code	91358900
Material no. (12 NC)	910501968503
SAP numerator – quantity per pack	1
EAN/UPC – Product/Case	8717943913589
Numerator – packs per outer box	1
EAN/UPC - Case	8717943913589

## Dimensional drawing

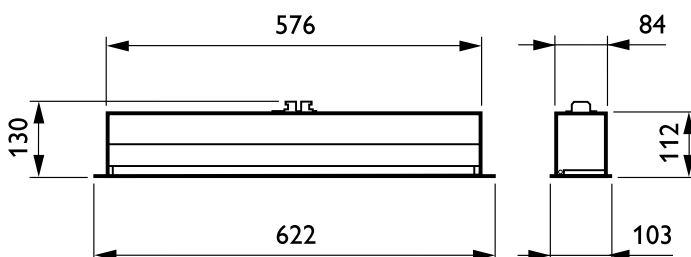

## Maxos LED, recessed

