



# TrueLine, recessed

## RC531B LED19S/830 PSD W8L150 VPC PI5

TrueLine Recessed NOC - 1 pc - LED Module, system flux 1900 lm - 930 warm white - Power supply unit with DALI interface - Visible profile ceiling version - Width 0.08 m, length 1.50 m - - - Push-in connector 5-pole - White

Architects need a lighting solution that matches the interior architecture of the property they are working on. They want a light line with an elegant design and very high light levels. Specifiers need luminaires that enable them to save energy while at the same time providing the right level of light, in compliance with office lighting norms. TrueLine, recessed is able to meet both sets of requirements. TrueLine is also available in suspended and surface-mounted versions.

### Product data

General Information		Connection	Push-in connector 5-pole
Number of light sources	1 [ 1 pc]	Cable	-
Lamp family code	LED19S [ LED Module, system flux 1900 lm]	Protection class IEC	Safety class I
Light source colour	930 warm white	Glow-wire test	Temperature 650 °C, duration 5 s
Cap base	- [ -]	Flammability mark	F [ For mounting on normally flammable surfaces]
Light source replaceable	No	CE mark	CE mark
Number of gear units	1 unit	ENEC mark	ENEC plus mark
Gear	-	UL mark	No
Driver/power unit/transformer	PSD [ Power supply unit with DALI interface]	Warranty period	5 years
Driver included	Yes	Remarks	*-Per Lighting Europe guidance paper "Evaluating performance of LED based luminaires - January 2018": statistically there is no relevant difference in lumen maintenance between B50 and for example
Optic type	No [ -]		
Optical cover/lens type	PM [ PMMA bowl/cover]		
Luminaire light beam spread	160°		
Embedded control	No [ -]		
Control interface	DALI		

## TrueLine, recessed

	B10. Therefore the median useful life (B50) value also represents the B10 value.
Constant light output	No
Number of products on MCB	24
RoHS mark	RoHS mark
Accessory PFC	N/A
Product Family Code	RC531B [ TrueLine Recessed NOC]
Unified glare rating CEN	25

### Operating and Electrical

Input voltage	220 to 240 V
Input frequency	50 to 60 Hz
Control signal voltage	0-16 V DC DALI
Inrush current	19 A
Inrush time	0.28 ms
Power factor (min.)	0.9

### Controls and Dimming

Dimmable	Yes
----------	-----

### Mechanical and Housing

Geometry	Width 0.08 m, length 1.50 m
Housing configuration	VPC [ Visible profile ceiling version]
Housing material	Steel
Reflector material	-
Optic material	-
Optical cover/lens material	Polycarbonate
Gear tray material	Steel
Fixation material	Steel
Optical cover/lens finish	Opal
Overall length	1497 mm
Overall width	75 mm
Overall height	79 mm
Colour	White

### Approval and Application

Ingress protection code	IP20 [ Finger-protected]
-------------------------	--------------------------

Mech. impact protection code	IK02 [ 0.2 J standard]
------------------------------	------------------------

### Initial Performance (IEC Compliant)

Initial luminous flux	1900 lm
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	101 lm/W
Init. Corr. colour temperature	3000 K
Init. colour rendering index	≥80
Initial chromaticity	(0.43, 0.40) SDCM<3
Initial input power	18.8 W
Power consumption tolerance	+/-10%

### Over Time Performance (IEC Compliant)

Control gear failure rate at median useful life 50000 h	5 %
Lumen maintenance at median useful life* 50000 h	L85


### Application Conditions

Ambient temperature range	+10 to +40 °C
Performance ambient temperature Tq	25 °C
Maximum dimming level	1%
Suitable for random switching	No

### Product Data

Full product code	871869907227800
Order product name	RC531B LED19S/830 PSD W8L150 VPC PI5
EAN/UPC – product	8718699072278
Order code	07227800
Numerator – quantity per pack	1
Numerator – packs per outer box	1
Material no. (12NC)	910502057803
Net weight (piece)	3.200 kg

## Dimensional drawing

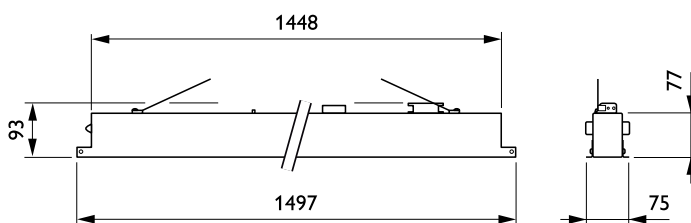

TrueLine recessed RC515B, RC530B-RC534B

