



CitySoul

CGP431 CPO-T140W/728 EB II OC FG GR 76P

CITY SOUL, MASTER CosmoWhite CPO-TW, 140 W, Electronic, Optic for CosmoPolis lamp, Flat glass, Post-top for diameter 76 mm

CitySoul is a family of modular street-lighting luminaires featuring state-of-the-art lamp and gear technologies – including LED – and offering outstanding optical performance. Its classic design merges well with today’s urban environment. The simple, flat, ellipsoidal form of the luminaire creates an elegant light-point. Suitable for side-entry, suspended or post-top installation, and with its adjustable beam and light trespass accessories, this versatile luminaire fits every application. CitySoul comes in two sizes, along with a complete range of dedicated masts and brackets.

Product data


General Information	
Lamp family code	CPO-TW [MASTER CosmoWhite CPO-TW]
Gear	EB [Electronic]
Photocell	-
Product family code	CGP431 [CITY SOUL]
Embedded control	-
CE mark	Yes
ENEC mark	ENEC mark
Light Technical	
Number of light sources	1
Light source color	728 warm white
Optical cover type	Flat glass
Optic type outdoor	Optic for CosmoPolis lamp

Operating and Electrical	
Input Voltage	220 to 240 V
Power Consumption	140 W
Connection	-
Mechanical and Housing	
Housing Color	Grey
Mounting device	Post-top for diameter 76 mm
Overall length	754 mm
Overall width	480 mm
Overall height	171 mm
Dimensions (Height x Width x Depth)	171 x 480 x 754 mm
Approval and Application	
Ingress protection code	IP66 [Dust penetration-protected, jet-proof]

Mech. impact protection code	IK08 [5 J vandal-protected]
Protection class IEC	Safety class II
Product Data	
Full product code	871155967976100
Order product name	CGP431 CPO-T140W/728 EB II OC FG GR 76P
Order code	910502105818
Numerator - Quantity Per Pack	1

Numerator - Packs per outer box	1
Material Nr. (12NC)	910502105818
Full product name	CGP431 CPO-T140W/728 EB II OC FG GR 76P
EAN/UPC - Case	8711559679761
EAN/UPC - Product/Case	8711559679761

Dimensional drawing

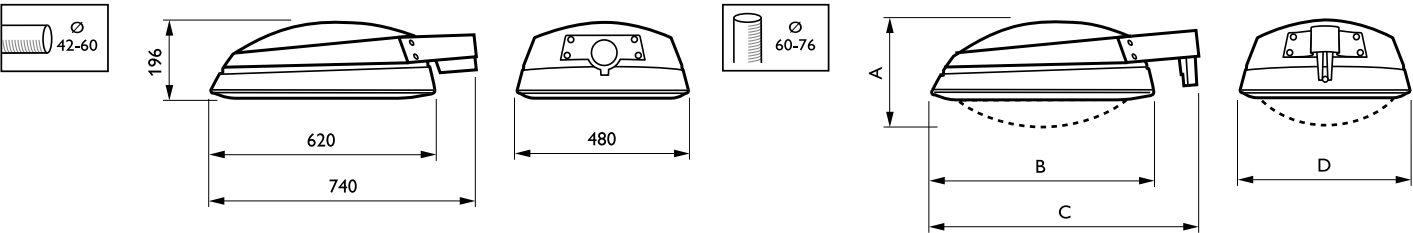

Product	A	B	C	D
CGP431 CPO-T140W/728 EB II OC FG GR 76P	196 mm	620 mm	754 mm	480 mm

