PHILIPS Lighting



Pacific TCW216

TCW216 2xTL-D36W/840 HFS EL3 SI

PACIFIC, 2, MASTER TL-D, 36 W, 840 neutral white, HF Performer, Emergency lighting 3 hours duration, Screw connection block 3-pole

Functional shock-, vandal-, dust-, and jetproof luminaire for TL-D and TL5 fluorescent lamps. Fibre-glass reinforced polyester housing with a polycarbonate prismatic clear cover. Fixation of the cover to the housing without additional lockers, but by innovative concept with integrated fixation points. Gear tray, 2 stainless steel ceiling fixation clips and cable entries (membranes) supplied with the luminaire. Choice of different standard versions available:. versions 1/2 x 18W, 1/2 x 36W, 1/2 x 58W (TL-D) and 1/2 x 49W (TL5),. emergency lighting, 1- or 3 hours,. ready-to-install, including lamp(s) and Waterproof External Connector (WEC),. equipped with through-wiring 5 x 2.5 mm².

Product data

| General Information | |
|--------------------------|---|
| Lamp family code | TL-D [MASTER TL-D] |
| Light source replaceable | Yes |
| Gear | HFP [HF Performer] |
| Driver included | Yes |
| Feed-through wiring | - |
| Product family code | TCW216 [PACIFIC] |
| Explosion hazard class | - |
| CE mark | Yes |
| Flammability mark | For mounting on normally flammable surfaces |
| ENEC mark | ENEC mark |
| Glow-wire test | Temperature 850 °C, duration 5 s |
| | |


| Light Technical | |
|------------------------------------|-------------------------------|
| Correlated Color Temperature (Nom) | 4000 K |
| Number of light sources | 2 |
| Light source color | 840 neutral white |
| Optic type | - |
| | |
| Operating and Electrical | |
| Input Voltage | 220 to 240 V |
| Power Consumption | 36 W |
| Connection | Screw connection block 3-pole |
| | |


Pacific TCW216

| Controls and Dimming | |
|--------------------------------------|--|
| Dimmable | No |
| | |
| Mechanical and Housing | |
| Housing Material | Polyester |
| Fixation point length distance (Nom) | 600 mm |
| Overall length | 1,300 mm |
| | |
| Approval and Application | |
| Ingress protection code | IP66 [Dust penetration-protected, jet-proof] |
| Mech. impact protection code | IK08 [5 J vandal-protected] |
| Protection class IEC | Safety class I |
| | |
| Application Conditions | |
| Suitable for random switching | Not applicable |
| | |

| Product Data | |
|---------------------------------|---------------------------------|
| Order product name | TCW216 2xTL-D36W/840 HFS EL3 SI |
| Full product name | TCW216 2xTL-D36W/840 HFS EL3 SI |
| Full product code | 871155969714700 |
| Order code | 69714700 |
| Material Nr. (12NC) | 910503303418 |
| Numerator - Quantity Per Pack | 1 |
| EAN/UPC - Product/Case | 8711559697147 |
| Numerator - Packs per outer box | 1 |
| EAN/UPC - Case | 8711559697147 |
| | |

Dimensional drawing

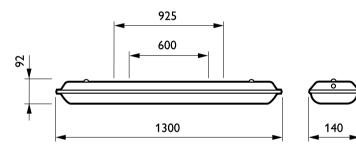

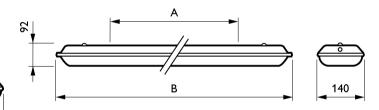

| Product | Α | В |
|---------------------------------|--------|----------|
| TCW216 2xTL-D36W/840 HFS EL3 SI | 925 mm | 1,300 mm |



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2023, April 29 - data subject to change