



eColor Graze MX Powercore

eColor Graze MX Powercore, Green, 10° x 60° Beam Angle, 305 mm (1 ft)

Green - 10° x 60° - 305 mm - Aluminum

Many architectural structures need a linear fixture capable of illuminating multiple storeys with minimal setback. Property owners/end users need a controllable product capable of dynamic illumination to draw attention to their establishments and emphasize their brands. Graze MX Powercore is capable of illuminating over 20 meters at very close setback distances. Powercore technology enables simple installation and long product run lengths.

Product data

General Information		Controls and Dimming	
Lamp family code	LED-HB [LED High Brightness]	Dimmable	Yes
Light source colour	Green		
Light source replaceable	No	Mechanical and Housing	
Driver included	Yes	Housing material	Aluminum extruded
Optical cover/lens type	PCC [Polycarbonate bowl/cover clear]	Optic material	Polycarbonate
Luminaire light beam spread	10° x 60°	Optical cover/lens material	Polycarbonate
Protection class IEC	Safety class I (I)	Length	305 mm
CE mark	CE mark	Colour	Aluminum
UL mark	UL and cUL mark		
Operating and Electrical		Approval and Application	
Input Voltage	100 to 277 V	Ingress protection code	IP66 [Dust penetration-protected, jet-proof]
Input frequency	50 to 60 Hz	Mech. impact protection code	IK10 [20 J vandal-resistant]
		Vibration standard	Complies with ANSI C136.31, 3G


eColor Graze MX Powercore

Vibration rating	Complies with ANSI C136.31, 3G
Initial Performance (IEC Compliant)	
Initial input power	15 W
Application Conditions	
Ambient temperature range	-40 to +50 °C
Product Data	
Full product code	871829160522599
Order product name	BCS439 10x60 GN L305
EAN/UPC – product	8718291605225

Order code	223-000080-05
SAP numerator – quantity per pack 1	
Numerator – packs per outer box	4
SAP material	910503703394
Net Weight (Piece)	1.200 kg
Commercial Code	223-000080-05
Commercial Code	eColor Graze MX Powercore, Green, 10° x 60° Beam Angle, 305 mm (1 ft)



Dimensional drawing

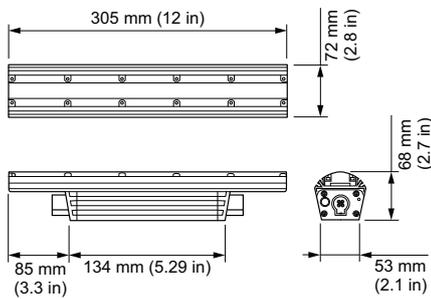

Graze

