



iW Graze EC Powercore

iW Graze EC Powercore, 90° x 90° Beam Angle, 914 mm (3 ft)

iW Graze EC Powercore, 90° x 90° Beam Angle, 914 mm (3 ft)

Some exterior architectural details require a soft-edged volume fill of light. Graze EC Powercore combines this output with the proven, durable design of the Graze Powercore product family and low power consumption.

Product data

General Information		Controls and Dimming	
Lamp family code	LED-HB [LED High Brightness]	Dimmable	Yes
Light source colour	Cool white and warm white		
Light source replaceable	No		
Driver included	Yes		
Optic type	90 [Beam angle 90°]		
Optical cover/lens type	PCF [Polycarbonate bowl/cover frosted]		
Luminaire light beam spread	90° x 90°		
Protection class IEC	Safety class I (I)		
CE mark	CE mark		
UL mark	UL and cUL mark		
Lifetime to 70% luminous flux	100000 h		
Operating and Electrical		Mechanical and Housing	
Input Voltage	100 to 277 V	Housing material	Aluminum extruded
Input frequency	50 to 60 Hz	Optic material	Polycarbonate
		Optical cover/lens material	Polycarbonate
		Length	914 mm
		Colour	Aluminum
		Approval and Application	
		Ingress protection code	IP66 [Dust penetration-protected, jet-proof]
		Mech. impact protection code	IK08 [5 J vandal-protected]
		Vibration standard	Not compliant to ANSI C136.31, 3G. Special orders are available to conform to the standard. Please contact your Color Kinetics Lighting Sales rep for custom configurations.

iW Graze EC Powercore

Vibration rating	Not compliant to ANSI C136.31, 3G. Special orders are available to conform to the standard. Please contact your Color Kinetics Lighting Sales rep for custom configurations.
-------------------------	--

Initial Performance (IEC Compliant)

Initial luminous flux (system flux)	1236 lm
Initial LED luminaire efficacy	29.6 lm/W
Init. Colour rendering index	82
Initial input power	30 W

Over Time Performance (IEC Compliant)

Lumen Maintenance 50% at 25 °C	100000
Calculated	
Lumen Maintenance 50% at 25 °C	36000
Reported	
Lumen Maintenance 50% at 50 °C	80000
Calculated	
Lumen Maintenance 50% at 50 °C	36000
Reported	
Lumen Maintenance 70% at 25 °C	100000
Calculated	
Lumen Maintenance 70% at 25 °C	36000
Reported	

Lumen Maintenance 70% at 50 °C	60000
Calculated	
Lumen Maintenance 70% at 50 °C	36000
Reported	

Application Conditions


Ambient temperature range	-40 to +50 °C
----------------------------------	---------------

Product Data

Full product code	871829160967400
Order product name	BCS438 2700-6500 L914
EAN/UPC – product	8718291609674
Order code	523-000079-42
SAP numerator – quantity per pack	1
Numerator – packs per outer box	1
SAP material	910503703686
SAP net weight (piece)	3.800 kg
Commercial Code	523-000079-42
Catalogue number description	iW Graze EC Powercore, 90° x 90° Beam Angle, 914 mm (3 ft)



Dimensional drawing

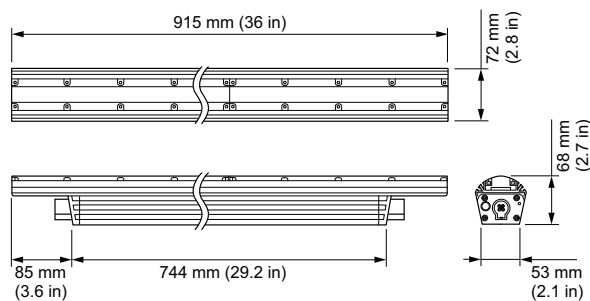

Graze

