



iW Graze EC Powercore

iW Graze EC Powercore, 90° x 90° Beam Angle, 1219 mm (4 ft)

iW Graze EC Powercore, 90° x 90° Beam Angle, 1219 mm (4 ft)

Some exterior architectural details require a soft-edged volume fill of light. Graze EC Powercore combines this output with the proven, durable design of the Graze Powercore product family and low power consumption.

Product data

General Information	
Lamp family code	LED-HB [LED High Brightness]
Light source colour	Cool white and warm white
Light source replaceable	No
Driver included	Yes
Optic type	90 [Beam angle 90°]
Optical cover/lens type	PCF [Polycarbonate bowl/cover frosted]
Luminaire light beam spread	90° x 90°
Protection class IEC	Safety class I
CE mark	CE mark
UL mark	UL and cUL mark
Lifetime to 70% luminous flux	100000 h
Operating and Electrical	
Input Voltage	100 to 277 V
Input frequency	50 to 60 Hz

Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Housing material	Extruded aluminium
Optic material	Polycarbonate
Optical cover/lens material	Polycarbonate
Length	1219 mm
Colour	Aluminium
Approval and Application	
Ingress protection code	IP66 [Dust penetration-protected, jet-proof]
Mech. impact protection code	IK08 [5 J vandal-protected]
Vibration standard	Not compliant to ANSI C136.31, 3G. Special orders are available to conform to the standard. Please contact your Color Kinetics Lighting Sales rep for custom configurations.

iW Graze EC Powercore

Vibration rating	Not compliant to ANSI C136.31, 3G. Special orders are available to conform to the standard. Please contact your Color Kinetics Lighting Sales rep for custom configurations.
-------------------------	--

Initial Performance (IEC Compliant)

Initial luminous flux (system flux)	1648 lm
Initial LED luminaire efficacy	29.6 lm/W
Init. Colour rendering index	82
Initial input power	40 W

Over Time Performance (IEC Compliant)

Lumen Maintenance 50% at 25 °C	100000
Calculated	
Lumen Maintenance 50% at 25 °C	36000
Reported	
Lumen Maintenance 50% at 50 °C	80000
Calculated	
Lumen Maintenance 50% at 50 °C	36000
Reported	
Lumen Maintenance 70% at 25 °C	100000
Calculated	
Lumen Maintenance 70% at 25 °C	36000
Reported	

Lumen Maintenance 70% at 50 °C	60000
Calculated	
Lumen Maintenance 70% at 50 °C	36000
Reported	

Application Conditions


Ambient temperature range	-40 to +50 °C
----------------------------------	---------------

Product Data

Full product code	871829160968100
Order product name	BCS438 2700-6500 L1219
EAN/UPC – product	8718291609681
Order code	523-000079-43
SAP numerator – quantity per pack	1
Numerator – packs per outer box	1
SAP material	910503703687
SAP net weight (piece)	4.700 kg
Commercial Code	523-000079-43
Catalogue number description	iW Graze EC Powercore, 90° x 90° Beam Angle, 1219 mm (4 ft)



Dimensional drawing

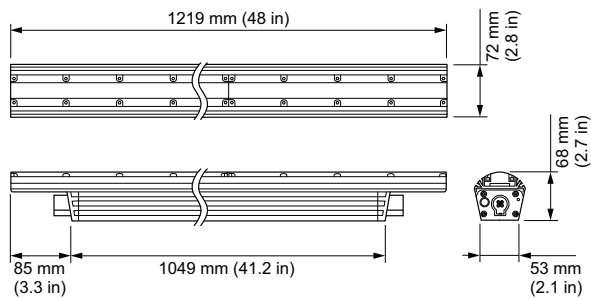

Graze

