



Pentura Mini LED

BN133C LED6S/840 PSU L600

LED Medium Power, 840 neutral white, Power supply unit (On/Off)

Pentura Mini LED is an extremely slim batten that offers the energy-saving benefits of LED technology, coupled with excellent lighting performance – bright, uniform light with good color rendering. Pentura Mini LED is very easy to install, even where space is limited, e.g. under shelves in shops, and over worktops and workstations in the home and home office. Thanks to its integrated driver and through-wiring, installation time is reduced to a minimum. Power cable, mounting clips and connection accessories are also supplied. Thin end-caps minimize black spots between the products, enabling consumers to create a continuous light-line.

Product data

General Information		Light Technical	
Lamp family code	LED-MP [LED Medium Power]	Luminous Flux	650 lm
Light source replaceable	No	Correlated Colour Temperature	4000 K
Number of gear units	Unit	Luminous efficacy (rated) (nom.)	93 lm/W
Gear	-	Colour rendering index (CRI)	≥80
Driver included	Yes	Beam angle of light source	- degree(s)
Remarks	*- According to the Lighting Europe guidance paper 'Evaluating performance of LED based luminaires – January 2018': statistically there is no relevant difference in lumen maintenance between the B50 and, for example, the B10. Therefore, the median useful life (B50) value also represents the B10 value.	Light source colour	840 neutral white
Lighting Technology	LED	Optic type	-
CE mark	Yes	Warranty period	3 years
		Flammability mark	-
		ENEC mark	-
		Glow-wire test	Temperature 650 °C, duration 30 s
		EU RoHS compliant	Yes

Pentura Mini LED

Luminaire light beam spread	135°
-----------------------------	------

Operating and Electrical

Input Voltage	220-240 V
Line Frequency	50 to 60 Hz
Inrush current	2 A
Inrush time	3.2 ms
Power Consumption	7 W
Power Factor (Fraction)	0.9
Connection	Flying leads/cables
Cable	-
Number of products on MCB of 16 A type B	180

Temperature

Ambient temperature range	0 to +35 °C
---------------------------	-------------

Controls and Dimming

Dimmable	No
Driver/power unit/transformer	Power supply unit (On/Off)
Constant light output	No

Mechanical and Housing

Housing material	Polycarbonate
Reflector material	-
Optic material	-
Optical cover/lens material	Polycarbonate
Fixation material	Steel
Housing Colour	White
Optical cover/lens finish	Opal
Overall length	598 mm
Overall width	22 mm
Overall height	34 mm
Dimensions (height x width x depth)	34 x 22 x 598 mm

Approval and Application

Ingress protection code	IP40 [Wire-protected]
Mech. impact protection code	IK02 [0.2 J standard]
Protection class IEC	Safety class II

Initial Performance (IEC Compliant)

Luminous flux tolerance	+/-10%
Initial chromaticity	(0.39, 0.38) SDCM<5
Power consumption tolerance	+/-10%

Over Time Performance (IEC Compliant)

Control gear failure rate at median useful life 50,000 h	7.5 %
Lumen maintenance at median useful life* 50,000 h	L65

Application Conditions


Performance ambient temperature Tq	25 °C
Suitable for random switching	No

Product Data

Order product name	BN133C LED6S/840 PSU L600
Full product name	BN133C LED6S/840 PSU L600
Full EOC	871869607251699
Order code	07251699
Material no. (12 NC)	910503910164
SAP numerator – quantity per pack	1
EAN/UPC – Product/Case	8718696072516
Numerator – packs per outer box	24
EAN/UPC - Case	8718696072615



Dimensional drawing

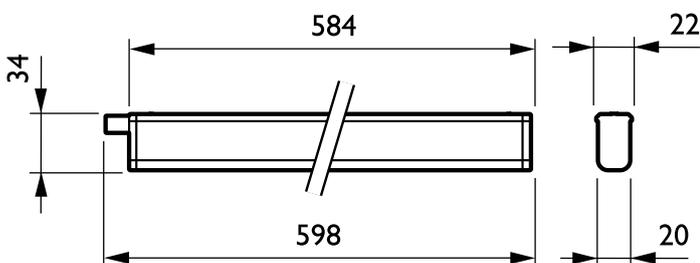

Pentura Mini LED

