



Cleanroom LED CR250B

CR150B LED35S/840 PSU W30L120 IP54

LED GreenLine 3500 lm, 840 neutral white, Power supply unit (On/Off), Dust accumulation-protected, splash-proof

In applications where hygiene is crucially important, such as hospitals and food production facilities, customers want proven IP65 and IP54-rated luminaires that are safe to use and come at an attractive price. This family of Philips Cleanroom CR250B fixtures represent true value for money: the Philips LED engine delivers reliable, high-quality light, and the flexible mounting possibilities mean that this cleanroom LED lighting family can be used in a wide range of applications. These cleanroom luminaires are also compliant with all relevant standards (CE, EMC, RoHS).

Product data

| General Information | | | |
|--------------------------|---|------------------------------------|---|
| Lamp family code | GRN35 [LED GreenLine 3500 lm] | CE mark | Yes |
| Light source replaceable | Yes | Warranty period | 5 years |
| Number of gear units | 1 unit | Flammability mark | For mounting on easily flammable surfaces |
| Driver included | Yes | ENEC mark | - |
| Remarks | *-Per Lighting Europe guidance paper "Evaluating performance of LED based luminaires - January 2018": statistically there is no relevant difference in lumen maintenance between B50 and for example B10. Therefore, the median useful life (B50) value also represents the B10 value. | Glow-wire test | Temperature 650 °C, duration 30 s |
| Lighting Technology | LED | EU RoHS compliant | Yes |
| Value ladder | Performance | Light Technical | |
| | | Luminous Flux | 3,500 lm |
| | | Correlated Color Temperature (Nom) | 4000 K |
| | | Luminous Efficacy (rated) (Nom) | 88 lm/W |
| | | Color rendering index (CRI) | >80 |
| | | Number of light sources | 2 |
| | | Light source color | 840 neutral white |

Cleanroom LED CR250B

| | |
|-----------------------------|------------------------------------|
| Optic type | - |
| Optical cover type | Polymethyl methacrylate bowl/cover |
| Luminaire light beam spread | 110° |
| Unified glare rating CEN | Not applicable |

Operating and Electrical

| | |
|--|---------------------------|
| Input Voltage | 220-240 V |
| Line Frequency | 50 to 60 Hz |
| Inrush current | 13 A |
| Inrush time | 270 ms |
| Power Consumption | 40 W |
| Power Factor (Fraction) | 0.9 |
| Connection | - |
| Cable | Cable 0.75 m without plug |
| Number of products on MCB of 16 A type B | 24 |

Temperature

| | |
|---------------------------|-------------|
| Ambient temperature range | 0 to +40 °C |
|---------------------------|-------------|

Controls and Dimming

| | |
|-------------------------------|----------------------------|
| Dimmable | No |
| Driver/power unit/transformer | Power supply unit (On/Off) |
| Constant light output | No |

Mechanical and Housing

| | |
|------------------------|-------------------------|
| Housing Material | Steel |
| Reflector material | - |
| Optic material | - |
| Optical cover material | Polymethyl methacrylate |
| Fixation material | - |
| Housing Color | White |
| Optical cover finish | Opal |
| Overall length | 1,195 mm |
| Overall width | 295 mm |
| Overall height | 102 mm |

| | |
|-------------------------------------|---------------------|
| Dimensions (Height x Width x Depth) | 102 x 295 x 1195 mm |
|-------------------------------------|---------------------|

Approval and Application

| | |
|------------------------------|--|
| Ingress protection code | IP54 [Dust accumulation-protected, splash-proof] |
| Mech. impact protection code | IK03 [0.3 J] |
| Sustainability rating | - |
| Protection class IEC | Safety class II |

Initial Performance (IEC Compliant)

| | |
|-----------------------------|----------------------|
| Luminous flux tolerance | +/-5% |
| Initial chromaticity | (0.38, 0.38) SDCM <4 |
| Power consumption tolerance | +/-5% |

Over Time Performance (IEC Compliant)

| | |
|---|-----|
| Control gear failure rate at median useful life 50000 h | 5 % |
| Lumen maintenance at median useful life* 50000 h | L70 |


Application Conditions

| | |
|------------------------------------|-------|
| Performance ambient temperature Tq | 25 °C |
| Suitable for random switching | Yes |

Product Data

| | |
|---------------------------------|------------------------------------|
| Order product name | CR150B LED35S/840 PSU W30L120 IP54 |
| Full product name | CR150B LED35S/840 PSU W30L120 IP54 |
| Full product code | 871869607293600 |
| Order code | 910503910177 |
| Material Nr. (12NC) | 910503910177 |
| Numerator - Quantity Per Pack | 1 |
| EAN/UPC - Product/Case | 8718696072936 |
| Numerator - Packs per outer box | 1 |
| EAN/UPC - Case | 8718696072936 |

Dimensional drawing

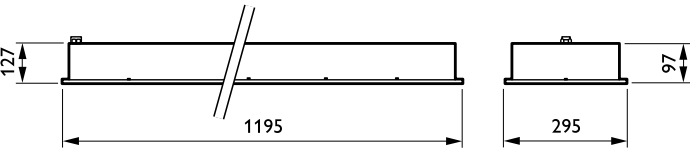

Cleanroom LED CR250B

