



# SmartForm TPS460/462/464

## TPS460 1x49W/830 HFP D8 SMT1

SmartForm suspended, 1, 49 W, 54 W, 830 warm white, HF Performer, Semi-high-gloss optic 3D micro-lamellae

We all feel and perform better in a pleasant, comfortable working environment. Designed for use in offices, shops and schools, the SmartForm family of suspended mounted luminaires combines best-in-class lighting with a clean, distinctive design. These ultra-flat luminaires are available with a choice of MASTER TL5, TL5 ECO or LED light sources in rectangular and square versions with direct/indirect lighting combinations. They can also be used to form light-lines and structures. With its wide choice of very efficient and comfortable micro-optics and covers, SmartForm suspended provides the ideal solution for every situation. Lighting controls can be added for further energy saving.

### Product data

General Information		Flammability mark	
Lamp family code	TL5 [TL5]		For mounting on normally flammable surfaces
Cap-Base	G5 [G5]	ENEC mark	ENEC mark
Light source replaceable	Yes	Glow-wire test	Temperature 850 °C, duration 5 s
Number of gear units	1 unit	EU RoHS compliant	Yes
Gear	HFP [HF Performer]	<b>Light Technical</b>	
Driver included	Yes	Luminous Flux	3,150 lm
Product family code	TPS460 [SmartForm suspended]	Correlated Color Temperature (Nom)	3000 K
Embedded control	-	Luminous Efficacy (rated) (Nom)	58 lm/W
CE mark	Yes	Color rendering index (CRI)	82
Warranty period	5 years	Number of light sources	1

# SmartForm TPS460/462/464

Light source color	830 warm white
Optic type	Semi-high-gloss optic 3D micro-lamellae
Optical cover type	-
Luminaire light beam spread	120°

## Operating and Electrical

Input Voltage	220-240 V
Line Frequency	50 to 60 Hz
Inrush current	48 A
Inrush time	1 ms
Power Consumption	49.54 W
Power Factor (Fraction)	0.96
Connection	Push-in connector 3-pole
Cable	Cable with CEE 7 plug 3-pole
Number of products on MCB of 16 A type B -	

## Temperature

Ambient temperature range	+10 to +40 °C
---------------------------	---------------

## Controls and Dimming

Dimmable	No
Driver/power unit/transformer	Electronic transformer
Constant light output	No

## Mechanical and Housing

Housing Material	Steel
Reflector material	Aluminum
Optic material	Aluminum
Optical cover material	-
Fixation material	Stainless steel
Fixation point length distance (Nom)	1,486 mm
Housing Color	White
Optical cover finish	-

Overall length	1,540 mm
Overall width	157 mm
Overall height	49 mm
Dimensions (Height x Width x Depth)	49 x 157 x 1540 mm

## Approval and Application

Ingress protection code	IP20 [Finger-protected]
Mech. impact protection code	IK07 [2 J reinforced]
Protection class IEC	Safety class I

## Initial Performance (IEC Compliant)

Luminous flux tolerance	+/-10%
Initial chromaticity	(0.43, 0.40) SDCM <3.5
Power consumption tolerance	+/-10%

## Over Time Performance (IEC Compliant)

Driver failure rate at 5000 h	1%
-------------------------------	----



## Application Conditions

Suitable for random switching	No
-------------------------------	----

## Product Data

Order product name	TPS460 1x49W/830 HFP D8 SMT1
Full product name	TPS460 1x49W/830 HFP D8 SMT1
Full product code	871794390020600
Order code	910504002003
Material Nr. (12NC)	910504002003
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8717943900206
Numerator - Packs per outer box	1
EAN/UPC - Case	8717943900206

## Dimensional drawing

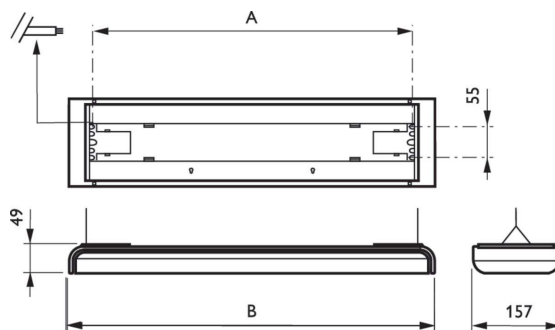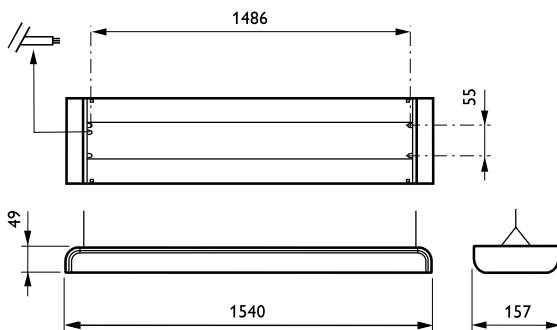

Product	A	B
TPS460 1x49W/830 HFP D8 SMT1	1,486 mm	1,540 mm

