



TrueLine, surface mounted

SM530C LED19S/840 PSD PI5 L1410 9003

TrueLine OC - LED Module, system flux 1900 lm - 840 neutral white - Power supply unit with DALI interface - Push-in connector 5-pole - 1410 mm - White

Architects need a lighting solution that matches the interior architecture of the property they are working on. They want a light line with an elegant design and very high light levels. Specifiers need luminaires that enable them to save energy while at the same time providing the right level of light, in compliance with office lighting norms. And office workers want visually comfortable lighting conditions that help them perform better. TrueLine Recessed is able to meet all these different requirements. TrueLine is also available in recessed and suspended versions.

Product data

| General information | | | |
|-------------------------------|---|-----------------------------|---|
| Number of light sources | 1 pc | Optical cover/lens type | Polymethyl methacrylate bowl/cover |
| Lamp family code | LED19S [LED Module, system flux 1900 lm] | Luminaire light beam spread | 100° |
| Beam angle of light source | - ° | Embedded control | - |
| Light source color | 840 neutral white | Control interface | DALI |
| Cap-Base | - [-] | Connection | Push-in connector 5-pole |
| Light source replaceable | No | Cable | - |
| Number of gear units | 1 unit | Protection class IEC | Safety class I |
| Gear | - | Standard RAL color | Signal white |
| Driver/power unit/transformer | Power supply unit with DALI interface | Glow-wire test | Temperature 650 °C, duration 5 s |
| Driver included | Yes | Flammability mark | For mounting on normally flammable surfaces |
| Optic type | - | Type description | Office compliant version |

TrueLine, surface mounted

| | |
|--|--|
| CE mark | CE mark |
| ENEC mark | ENEC plus mark |
| UL mark | - |
| Warranty period | 5 years |
| Remarks | *-Per Lighting Europe guidance paper "Evaluating performance of LED based luminaires - January 2018": statistically there is no relevant difference in lumen maintenance between B50 and for example B10. Therefore the median useful life (B50) value also represents the B10 value. |
| Constant light output | No |
| Number of products on MCB of 16 A type B | 24 |
| RoHS mark | RoHS mark |
| Accessory PFC | N/A |
| Product family code | SM530C [TrueLine OC] |
| Unified glare rating CEN | 16 |

Operating and Electrical

| | |
|------------------------|----------------|
| Input Voltage | 220 to 240 V |
| Input Frequency | 50 to 60 Hz |
| Control signal voltage | 0-16 V DC DALI |
| Inrush current | 19 A |
| Inrush time | 0.28 ms |
| Power Factor (Min) | 0.9 |

Controls and Dimming

| | |
|----------|-----|
| Dimmable | Yes |
|----------|-----|

Mechanical and Housing

| | |
|-----------------------------|-------------------------|
| Geometry | - |
| Housing Material | Aluminum |
| Reflector material | - |
| Optic material | - |
| Optical cover/lens material | Polymethyl methacrylate |
| Gear tray material | Steel |
| Fixation material | Steel |
| Optical cover/lens finish | Frosted |
| Overall length | 1409 mm |
| Overall width | 55 mm |
| Overall height | 93 mm |

| | |
|--------|---------|
| Length | 1410 mm |
| Color | White |

Approval and Application

| | |
|------------------------------|------------------------|
| Ingress protection code | IP40 [Wire-protected] |
| Mech. impact protection code | IK02 [0.2 J standard] |

Initial Performance (IEC Compliant)

| | |
|-------------------------------------|----------------------|
| Initial luminous flux (system flux) | 1900 lm |
| Luminous flux tolerance | +/-10% |
| Initial LED luminaire efficacy | 153 lm/W |
| Init. Corr. Color Temperature | 4000 K |
| Init. Color Rendering Index | ≥80 |
| Initial chromaticity | (0.38, 0.38) SDCM <3 |
| Initial input power | 12.4 W |
| Power consumption tolerance | +/-10% |

Over Time Performance (IEC Compliant)

| | |
|---|-----|
| Control gear failure rate at median useful life 50000 h | 5 % |
| Lumen maintenance at median useful life* 50000 h | L85 |

Application Conditions


| | |
|------------------------------------|---------------|
| Ambient temperature range | +10 to +40 °C |
| Performance ambient temperature Tq | 25 °C |
| Maximum dim level | 1% |
| Suitable for random switching | No |

Product Data

| | |
|---------------------------------|--------------------------------------|
| Full product code | 871869906368900 |
| Order product name | SM530C LED19S/840 PSD PI5 L1410 9003 |
| EAN/UPC - Product | 8718699063689 |
| Order code | 910504107703 |
| Numerator - Quantity Per Pack | 1 |
| Numerator - Packs per outer box | 1 |
| Material Nr. (12NC) | 910504107703 |
| Net Weight (Piece) | 4.000 kg |



TrueLine, surface mounted

Dimensional drawing

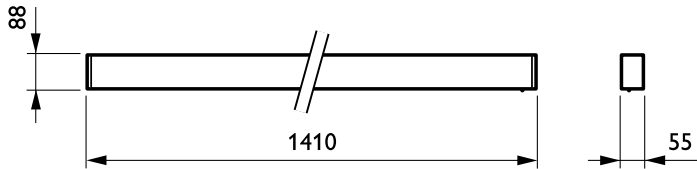

TrueLine surface-mounted SM530C-SM534C

Photometric data

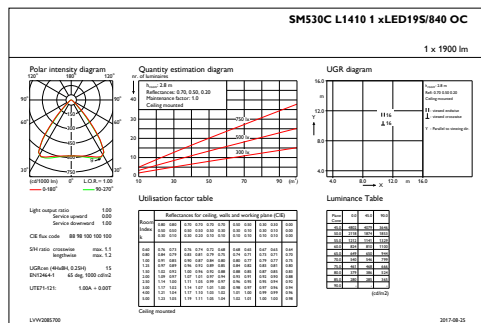

IFGU1_SM530CL14101xLED19S840OC

IFPC1_SM530CL14101xLED19S840OC

