

# TrueLine, suspended

## SP534P LED34S/840 PSD LE1 PI5 SM2 L1130

TrueLine Suspended DIRECT Asym - LED Module, system flux 3400 lm - 840 neutral white - Power supply unit with DALI interface - Line-end luminaire 1-phase - - - Push-in connector 5-pole - Suspension set 2-wire - 1130 mm - Aluminum

Architects need a lighting solution that matches the interior architecture of the property they are working on. They want a light line with an elegant design and very high light levels. Specifiers need luminaires that enable them to save energy while at the same time providing the right level of light, in compliance with office lighting norms. TrueLine, suspended is able to meet both sets of requirements. TrueLine is also available in recessed and surface-mounted versions.

### Product data

General Information		Connection	Push-in connector 5-pole
Number of light sources	1 pc	Cable	Cable 1.7 m without plug 5-pole PVC silver
Lamp family code	LED34S [ LED Module, system flux 3400 lm]	Protection class IEC	Safety class I
Light source color	840 neutral white	Mounting	Suspension set 2-wire
Cap-Base	- [ -]	Glow-wire test	Temperature 650 °C, duration 5 s
Light source replaceable	No	Flammability mark	For mounting on normally flammable surfaces
Number of gear units	1 unit	Type description	Office compliant version
Gear	-	CE mark	CE mark
Driver/power unit/transformer	Power supply unit with DALI interface	ENEC mark	ENEC plus mark
Driver included	Yes	UL mark	-
Optic type	-	Warranty period	5 years
Optical cover/lens type	Polymethyl methacrylate bowl/cover	Remarks	*-Per Lighting Europe guidance paper "Evaluating performance of LED based luminaires - January 2018": statistically there is no relevant difference in lumen
Luminaire light beam spread	90°		
Embedded control	-		
Control interface	DALI		

## TrueLine, suspended

	maintenance between B50 and for example B10. Therefore the median useful life (B50) value also represents the B10 value.
Constant light output	No
Number of products on MCB of 16 A type B	24
RoHS mark	RoHS mark
WEEE mark	WEEE mark
Accessory PFC	N/A
Product family code	SP534P [ TrueLine Suspended DIRECT Asym]
Unified glare rating CEN	Not applicable
<b>Operating and Electrical</b>	
Input Voltage	220-240 V
Input Frequency	50 to 60 Hz
Control signal voltage	0-16 V DC DALI
Inrush current	19 A
Inrush time	0.28 ms
Power Factor (Min)	0.9
<b>Controls and Dimming</b>	
Dimmable	Yes
<b>Mechanical and Housing</b>	
Housing configuration	Line-end luminaire 1-phase
Housing Material	Aluminum
Reflector material	-
Optic material	-
Optical cover/lens material	Polymethyl methacrylate
Gear tray material	Steel
Fixation material	Stainless steel
Optical cover/lens finish	Frosted
Overall length	1130 mm
Overall width	55 mm
Overall height	88 mm
Length	1130 mm
Color	Aluminum

### Approval and Application

Ingress protection code	IP40 [ Wire-protected]
Mech. impact protection code	IK02 [ 0.2 J standard]

### Initial Performance (IEC Compliant)

Initial luminous flux (system flux)	3400 lm
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	121 lm/W
Init. Corr. Color Temperature	4000 K
Init. Color Rendering Index	≥80
Initial chromaticity	(0.38, 0.38) SDCM <3
Initial input power	28 W
Power consumption tolerance	+/-10%

### Over Time Performance (IEC Compliant)


Control gear failure rate at median useful life 50000 h	5 %
Lumen maintenance at median useful life* 50000 h	L85

### Application Conditions

Ambient temperature range	+10 to +40 °C
Performance ambient temperature Tq	25 °C
Maximum dim level	1%
Suitable for random switching	No


### Product Data

Full product code	871869907279700
Order product name	SP534P LED34S/840 PSD LE1 PI5 SM2 L1130
EAN/UPC - Product	8718699072797
Order code	910504113003
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	1
Material Nr. (12NC)	910504113003
Net Weight (Piece)	3.300 kg



## TrueLine, suspended

### Dimensional drawing

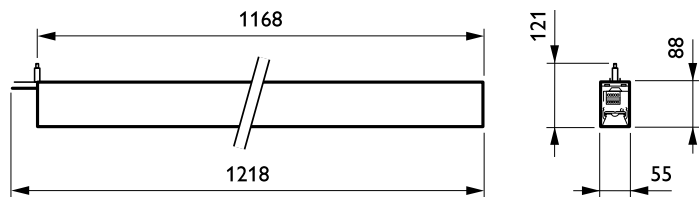

TrueLine suspended SP530P-SP533P

