



# Maxos, TL-D standard trunking

4MX056 363 7x2.5 SI

MAXOS TST8, Silver

The light line fulfils two functions: first, it provides a sturdy in-line mounting rail on which to fix the electrical units, and second, it provides a housing for the electrical cables that bring power to the units. All the light-line sections are made of hot-dip galvanized steel with a white or silver finish and available in lengths of 1, 2 and 3 electrical units 36 and 58 W. A flat ribbon cable (5 or 7 wires) or two flat ribbon cables (2 x 5 or 2 x 7 wires) are integrated in the light line and guarantee (in combination with an integrated phase selection switch and contact blocks) safe and correct cabling. The 7-wire cable is used to integrate light regulation or emergency lighting for those electrical units that are equipped with emergency battery packs. Double wiring (2 x 5 or 2 x 7 wires) is needed to provide a completely separate mains supply to the electrical units. Double wiring is mostly used for emergency lighting by central emergency batteries or separate switching. Hence, no extra contact blocks or wiring are required.

## Product data

General Information	
Product family code	4MX056 [MAXOS TST8]
Flammability mark	For mounting on normally flammable surfaces
ENEC mark	ENEC mark
Mechanical and Housing	
Housing Color	Silver
Overall length	3,690 mm


Approval and Application	
Ingress protection code	IP20 [Finger-protected]
Protection class IEC	Safety class I
Product Data	
Order product name	4MX056 363 7x2.5 SI
Full product name	4MX056 363 7x2.5 SI
Full product code	403073255293199
Order code	910615024326

# Maxos, TL-D standard trunking

Material Nr. (12NC)	910615024326
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	4030732552931
Numerator - Packs per outer box	2

EAN/UPC - Case	4030732105922
----------------	---------------

## Dimensional drawing

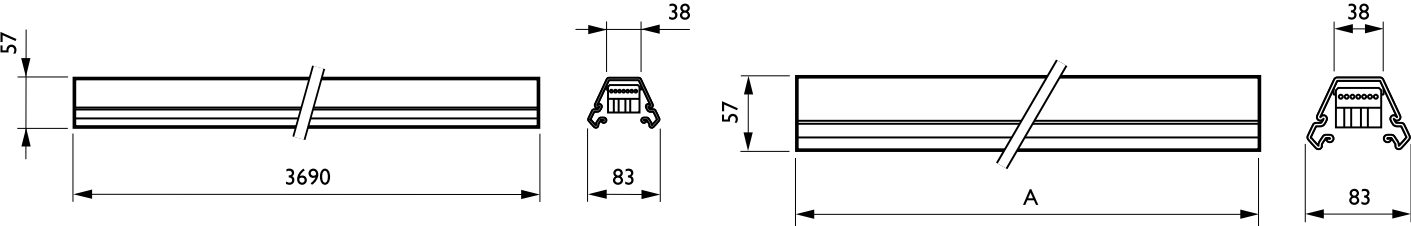

Product
4MX056 363 7x2.5 SI

