



# Koffer² SGP070

## SGP070 CPO-TW90W K EB II GB AL SI

MASTER CosmoWhite CPO-TW, 90 W, Electronic, Safety class II, Glass bowl/cover, Silver

Koffer² is an archetypal modern road lighting luminaire which meets the needs of today's road users and operators. Total cost over lifetime was a key consideration in the development of Koffer². The future-proof luminaire delivers outstanding optical performance, enabling optimum spacing and energy efficiency, and is easy to install and maintain. With its rectangular shape, Koffer² offers an alternative to rounded luminaires. It is available in three sizes – for mounting heights from 3.5 to 12 meters – and with dedicated masts and brackets, making it equally suitable for integration into modern urban environments or more traditional lighting designs. The Koffer² family accommodates CosmoPolis white-light technology and LED-enabled versions. Each Koffer² luminaire is fully recyclable; only the light source and driver have to be recycled separately.

### Product data

General Information		Optical cover type	
Lamp family code	CPO-TW [MASTER CosmoWhite CPO-TW]	Glass bowl/cover	
Gear	EB [Electronic]	Operating and Electrical	
Photocell	-	Input Voltage	220 to 240 V
Embedded control	-	Power Consumption	90 W
CE mark	Yes	Cable	-
ENEC mark	ENEC mark	Mechanical and Housing	
Light Technical		Housing Color	Silver
Standard tilt angle posttop	10°	Parts color	All parts colored
Number of light sources	1		


Koffer² SGP070

Approval and Application	
Ingress protection code	IP66 [Dust penetration-protected, jet-proof]
Mech. impact protection code	IK08 [5 J vandal-protected]
Protection class IEC	Safety class II

Product Data	
Order product name	SGP070 CPO-TW90W K EB II GB AL SI
Full product name	SGP070 CPO-TW90W K EB II GB AL SI
Full product code	403073222629000

Order code	910616592721
Material Nr. (12NC)	910616592721
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	4030732226290
Numerator - Packs per outer box	1
EAN/UPC - Case	4030732226290

Dimensional drawing

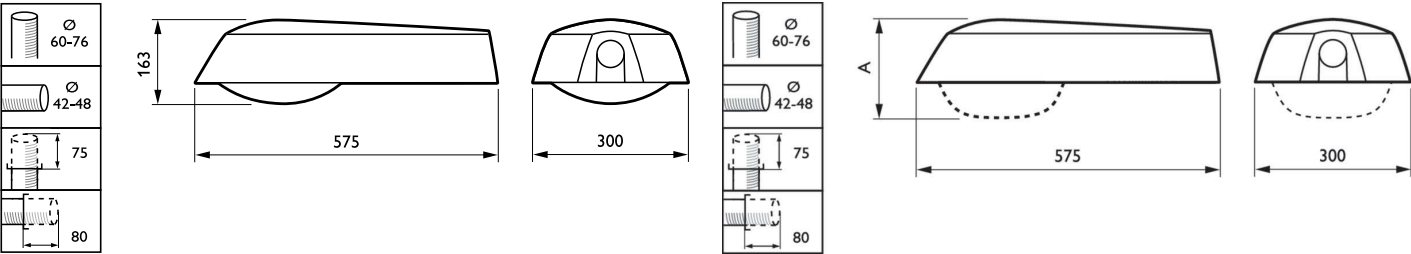

Product	A
SGP070 CPO-TW90W K EB II GB AL SI	163 mm

