



# **TMS028**

## TMS028 1xTL-D36W HF

TMS028, 1, MASTER TL-D, 36 W, Electronic high-frequency

TMS028 is a basic batten for 1 or 2 TL-D fluorescent lamps and includes optics for general lighting. It can be suspended or surface-mounted. A lamellae louver, end caps and inline couplers are available as accessories. The repositionable contact block enables flexible connection (with cable entry centrally or via the end caps).

#### **Product data**


General Information	
Lamp family code	TL-D [MASTER TL-D]
Gear	HF [Electronic high-frequency]
Feed-through wiring	-
Product family code	TMS028 [TMS028]
CE mark	Yes
Flammability mark	For mounting on normally flammable surfaces
ENEC mark	ENEC mark
Glow-wire test	Temperature 850 °C, duration 5 s
Light Technical	
Number of light sources	1
Operating and Electrical	
Input Voltage	220 to 240 V
Power Consumption	36 W
Connection	-
Approval and Application	
Ingress protection code	IP20 [Finger-protected]

Protection class IEC	Safety class I
<b>Application Conditions</b>	
Suitable for random switching	Not applicable
Product Data	
Order product name	TMS028 1xTL-D36W HF
Full product name	TMS028 1xTL-D36W HF
Full product code	871829104494900
Order code	910925850303
Material Nr. (12NC)	910925850303
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718291044949
Numerator - Packs per outer box	1
EAN/UPC - Case	8718291044949

Datasheet, 2023, September 4 data subject to change

## **TMS028**

### Dimensional drawing

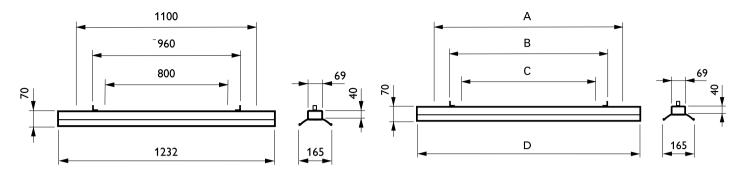

Product

TMS028 1xTL-D36W HF

