



CoreLine Trunking

LL120X LED84S/840 1x PSU O 7 WH

CoreLine Trunking, 6, LED Module, system flux 8400 lm, Power supply unit (On/Off), Opal, Feed-through wiring 7-phase, White

Whether for a new facility or renovation of an existing space, customers want lighting solutions that provide quality of light and substantial energy and maintenance savings. The new CoreLine Trunking range of LED products can be used to replace general lighting. The process of selecting, installing and maintaining is so easy – it's a simple switch.

Product data

General Information		Flammability mark	
Lamp family code	LED84S [LED Module, system flux 8400 lm]		For mounting on normally flammable surfaces
Light source replaceable	No	ENEC mark	ENEC mark
Number of gear units	1 unit	Glow-wire test	Temperature 850 °C, duration 5 s
Driver included	Yes	EU RoHS compliant	Yes
Feed-through wiring	Feed-through wiring 7-phase	Light Technical	
Remarks	*-Per Lighting Europe guidance paper "Evaluating performance of LED based luminaires - January 2018": statistically there is no relevant difference in lumen maintenance between B50 and for example B10. Therefore, the median useful life (B50) value also represents the B10 value.	Luminous Flux	8,400 lm
Service tag	Yes	Correlated Color Temperature (Nom)	4000 K
Product family code	LL120X [CoreLine Trunking]	Luminous Efficacy (rated) (Nom)	131 lm/W
Lighting Technology	LED	Color rendering index (CRI)	≥80
CE mark	Yes	Number of light sources	6
Warranty period	3 years + 2 years upon registration	Beam angle of light source	120 degree(s)
		Light source color	840 neutral white
		Optic type	-
		Optical cover type	Opal
		Luminaire light beam spread	117°

CoreLine Trunking

Unified glare rating CEN	Not applicable
Operating and Electrical	
Input Voltage	220 to 240 V
Line Frequency	50 to 60 Hz
Inrush current	19 A
Inrush time	0.28 ms
Power Consumption	64 W
Power Factor (Fraction)	0.95
Connection	Connection unit 7-pole
Cable	-
Number of products on MCB of 16 A type B	24
Temperature	
Ambient temperature range	-20 to +35 °C
Controls and Dimming	
Dimmable	No
Driver/power unit/transformer	Power supply unit (On/Off)
Constant light output	No
Mechanical and Housing	
Housing Material	Steel
Reflector material	-
Optic material	Polycarbonate
Optical cover material	Polycarbonate
Fixation material	Steel
Housing Color	White
Optical cover finish	Opal
Overall length	3,450 mm
Overall width	95 mm
Overall height	52 mm
Dimensions (Height x Width x Depth)	52 x 95 x 3450 mm

Approval and Application

Ingress protection code	IP20 [Finger-protected]
Mech. impact protection code	IK02 [0.2 J standard]
Protection class IEC	Safety class I

Initial Performance (IEC Compliant)

Luminous flux tolerance	+/-7%
Initial chromaticity	(0.38, 0.38) SDCM <3
Power consumption tolerance	+/-11%

Over Time Performance (IEC Compliant)

Control gear failure rate at median useful life 50000 h	5 %
Lumen maintenance at median useful life* 50000 h	L80


Application Conditions

Performance ambient temperature Tq	25 °C
Suitable for random switching	No

Product Data

Order product name	LL120X LED84S/840 1x PSU O 7 WH
Full product name	LL120X LED84S/840 1x PSU O 7 WH
Full product code	871869634741600
Order code	910925863330
Material Nr. (12NC)	910925863330
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718696347416
Numerator - Packs per outer box	1
EAN/UPC - Case	8718696347416

Dimensional drawing

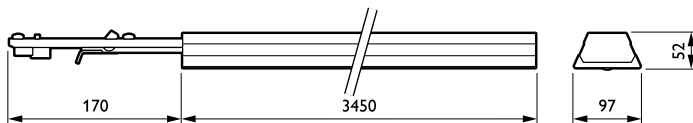

CoreLine Trunking

