



GreenSpace Surface-mounted

SM295C LED68/865 PSU WP WH

GreenSpace Surface-mounted, 66 W, 6600 lm, 6500 K, High-gloss mirror, Dust penetration-protected, jet-proof

Philips GreenSpace Surface-mounted LED Downlight delivers a superior LED alternative that's up to 66% more energy efficient than the conventional downlight retrofits. Blending seamlessly into its environment, GreenSpace Surface-mounted LED Downlight mimics the form of conventional recessed downlights minus the associated high energy and maintenance costs. Philips GreenSpace Surface-mounted LED Downlight is also ideal for all commercial lighting applications as well as public indoor space where there is limited space in the ceiling.

Product data


General Information		Color rendering index (CRI)	
Light source replaceable	No	Light source color	865 cool daylight
Number of gear units	1 unit	Optic type	High-gloss mirror
Driver included	Yes	Optical cover type	Reflector
Light source engine type	LED	Luminaire light beam spread	60°
Service tag	Yes	Operating and Electrical	
Glow-wire test	Temperature 750 °C, duration 5 s	Input Voltage	220 to 240 V
CE mark	CE mark	Line Frequency	50 or 60 Hz
Warranty period	3 years	Inrush current	25 A
Light Technical		Inrush time	0.202 ms
Luminous Flux	6,600 lm	Power Consumption	66 W
Correlated Color Temperature (Nom)	6500 K	Power Factor (Fraction)	0.9
Luminous Efficacy (rated) (Nom)	100 lm/W		

GreenSpace Surface-mounted

Number of products on MCB of 16 A type B 24	
Temperature	
Ambient temperature range	-20 to +40 °C
Controls and Dimming	
Dimmable	No
Driver/power unit/transformer	Power supply unit (On/Off)
Control interface	-
Constant light output	No
Mechanical and Housing	
Housing Material	Aluminum die cast
Reflector material	Aluminum
Optic material	Aluminum
Optical cover material	-
Housing Color	White
Optical cover finish	-
Overall length	0 mm
Overall width	0 mm
Overall height	239 mm
Overall diameter	200 mm
Dimensions (Height x Width x Depth)	239 x 0 x 0 mm
Approval and Application	
Ingress protection code	IP65 [Dust penetration-protected, jet-proof]
Mech. impact protection code	IK02 [0.2 J standard]

Protection class IEC	Safety class I
Initial Performance (IEC Compliant)	
Luminous flux tolerance	+/-10%
Initial chromaticity	(0.31, 0.32) SDCM<5
Power consumption tolerance	+/-10%
Over Time Performance (IEC Compliant)	
Driver failure rate at 5000 h	0.01 %
Median useful life L70B50	50,000 hour(s)
Median useful life L80B50	40,000 hour(s)
Median useful life L90B50	20,000 hour(s)
Application Conditions	
Maximum dim level	Not applicable
Suitable for random switching	No
Product Data	
Order product name	SM295C LED68/865 PSU WP WH
Full product name	SM295C LED68/865 PSU WP WH
Full product code	911401512031
Order code	911401512031
Material Nr. (12NC)	911401512031
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	1

Dimensional drawing

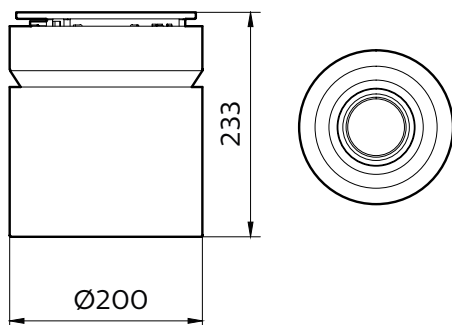

GreenSpace Surface-mounted

