



# Greenperform Waterproof

## WT160C LED20 NW L1200

Greenperform Waterproof, 20 W, 2200 lm, 4000 K, 120°

GreenPerform LED Waterproof is a high quality luminaire with a high system efficacy that delivers significant energy savings of up to 50% as compared to conventional T8 battens. With a reliable and robust housing structure, this maximizes the endurance and contributes to its long lifetime. It is suitable to be used in both direct and indirect lighting applications. This is due to its flexible optics and choice of symmetric or asymmetric mounting accessories that allows for a variety of different lighting applications.

### Product data

General Information		Light Technical	
Lamp family code	LED22S [LED Module, system flux 2200 lm]	Luminous Flux	2,200 lm
Light source replaceable	No	Correlated Color Temperature (Nom)	4000 K
Number of gear units	1 unit	Luminous Efficacy (rated) (Nom)	110 lm/W
Gear	-	Color rendering index (CRI)	80
Driver included	Yes	Beam angle of light source	120 degree(s)
CE mark	-	Light source color	Neutral white
Warranty period	3 years	Optic type	Wide beam
Flammability mark	For mounting on normally flammable surfaces	Optical cover type	Linear-lens array in polycarbonate cover
ENEC mark	-	Luminaire light beam spread	120°
Glow-wire test	Temperature 650 °C, duration 30 s	Operating and Electrical	
EU RoHS compliant	Yes	Input Voltage	220-240 V
		Line Frequency	50 to 60 Hz
		Inrush current	8 A

## Greenperform Waterproof

Inrush time	65 ms
Power Consumption	20 W
Power Factor (Fraction)	0.9
Connection	External connector
Cable	Cable 0.25 m with push-in connector 3-pole
Number of products on MCB of 16 A type B 24	

### Temperature

Ambient temperature range	-25 to +40 °C
---------------------------	---------------

### Controls and Dimming

Dimmable	No
Driver/power unit/transformer	Power supply unit (On/Off)
Constant light output	No

### Mechanical and Housing

Housing Material	Polycarbonate
Reflector material	Steel
Optic material	Polycarbonate
Optical cover material	Polycarbonate
Fixation material	Stainless steel
Housing Color	Gray and white
Optical cover finish	Opal
Overall length	1,197 mm
Overall width	74 mm
Overall height	58 mm
Dimensions (Height x Width x Depth)	58 x 74 x 1197 mm

### Approval and Application

Ingress protection code	IP65 [Dust penetration-protected, jet-proof]
Mech. impact protection code	IK08 [5 J vandal-protected]
Protection class IEC	Safety class I

### Initial Performance (IEC Compliant)

Luminous flux tolerance	+/-7.5%
Initial chromaticity	(0.38, 0.38) SCDM <4
Power consumption tolerance	+/-10%


### Over Time Performance (IEC Compliant)

Driver failure rate at 5000 h	1 %
Median useful life L70B50	50,000 hour(s)
Median useful life L80B50	48,000 hour(s)
Median useful life L90B50	45,000 hour(s)

### Product Data

Order product name	WT160C LED20 NW L1200
Full product name	WT160C LED20 NW L1200
Full product code	911401512611
Order code	01512611
Material Nr. (12NC)	911401512611
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	1

### Dimensional drawing

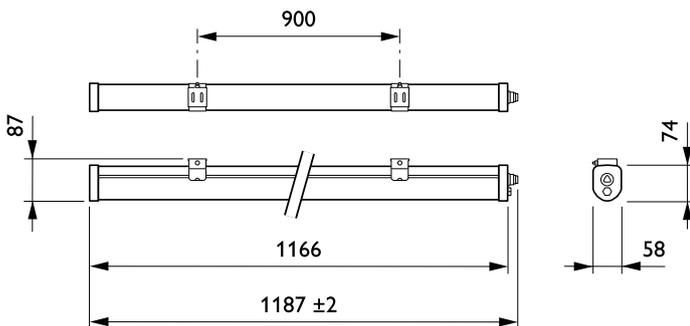

## Greenperform Waterproof

