



Downlight DN060B

DN060B LED18S/830 PSU WH

Downlight DN060B, 18 W, 1800 lm, 3000 K, Opal

The LEDINAIRE range contains a selection of popular off-the-shelf LED luminaires that come with the high Philips quality levels at a competitive price. Reliable, energy-efficient and affordable – just what you need.

Product data

General Information	
Light source replaceable	No
Gear	-
Lighting Technology	LED
Value ladder	Value
Warranty period	5 years
Light Technical	
Luminous Flux	1,800 lm
Correlated Colour Temperature	3000 K
Luminous efficacy (rated) (nom.)	100 lm/W
Colour rendering index (CRI)	>80
Light source colour	830 warm white
Luminaire light beam spread	110°
Operating and Electrical	
Input Voltage	220 to 240 V
Line Frequency	50 or 60 Hz
Input frequency	50 or 60 Hz
Power Consumption	18 W
Power Factor (Fraction)	0.9


Connection	Push-in connector 2-pole
Temperature	
Ambient temperature range	0 to +35 °C
Controls and Dimming	
Dimmable	No
Driver/power unit/transformer	Power supply unit (On/Off)
Mechanical and Housing	
Housing material	Plastic
Reflector material	Steel
Optic material	Polycarbonate
Fixation material	Stainless steel
Housing Colour	White
Optical cover/lens finish	Opal
Overall length	225 mm
Overall width	225 mm
Overall height	120 mm
Overall diameter	233 mm

Downlight DN060B


Dimensions (height x width x depth)	120 x 225 x 225 mm
Approval and Application	
Ingress protection code	IP20 [Finger-protected]
Mech. impact protection code	IK02 [0.2 J standard]
Protection class IEC	Safety class I
Initial Performance (IEC Compliant)	
Initial chromaticity	(0.43, 0.40) SDCM <5
Power consumption tolerance	+/-10%
Over Time Performance (IEC Compliant)	
Control gear failure rate at median useful life 50,000 h	7.5 %
Lumen maintenance at median useful life* 50,000 h	L65
Application Conditions	
Performance ambient temperature Tq	25 °C

Product Data	
Order product name	DN060B LED18S/830 PSU WH
Full product name	DN060B LED18S/830 PSU WH
Full EOC	871016330661299
Order code	30661299
Material no. (12 NC)	911401531931
Local order code	DN0601883UW
SAP numerator – quantity per pack	1
EAN/UPC – Product/Case	8710163306612
Numerator – packs per outer box	8
EAN/UPC - Case	8710163306896


Dimensional drawing

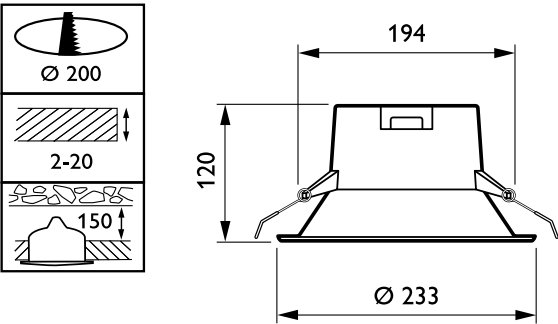

Photometric data



Light Distribution Diagram - DN060B LED18S/830 PSU WH



General uniform lighting - DN060B LED18S/830 PSU WH

Downlight DN060B

