



Stela+ gen2 Round

BPP611 1400/CW PSU WRN CLO 76P L20 SVP

STELA-ROUND AREA GEN2, LED XP-G2, Power supply unit (On/Off), Wide road optic for S-class, Constant light output, Post-top for diameter 76 mm

Stela Round is at the forefront of LED technology in street lighting. The REVOLED cooling and light distribution concept enables tremendous energy savings and a corresponding reduction in CO2 emissions, whilst meeting current lighting standards. Excellent thermal management of the LEDs ensures a very long lifetime, eliminating the need for lamp replacement and resulting in a very attractive Total Cost of Ownership. The introduction of the latest-generation LED and programmable drivers and the possibility of employing Constant Light Output (CLO) in gen2 enable a further reduction in power consumption.

Product data

General Information		EU RoHS compliant	
Lamp family code	XP-G2 [LED XP-G2]		Yes
Light source replaceable	No	Light Technical	
Number of gear units	1 unit	Upward light output ratio	0
Driver included	Yes	Luminous Flux	1,260 lumen
Light source engine type	LED	Standard tilt angle posttop	0°
Product family code	BPP611 [STELA-ROUND AREA GEN2]	Standard tilt angle side entry	-
Lighting Technology	LED	Correlated Color Temperature (Nom)	5700 K
Embedded control	Constant light output	Luminous Efficacy (rated) (Nom)	115 lm/W
CE mark	Yes	Color rendering index (CRI)	≥70
Warranty period	5 years	Number of light sources	12
Flammability mark	-	Light source color	Cool white
ENEC mark	-	Optical cover type	Polymethyl methacrylate bowl/cover
		Luminaire light beam spread	154° x 118°

Stela+ gen2 Round

Optic type outdoor	Wide road optic for S-class
--------------------	-----------------------------

Operating and Electrical

Input Voltage	220 to 240 V
Line Frequency	50 to 60 Hz
Initial CLO power consumption	11 W
Average CLO power consumption	11 W
End CLO power consumption	11 W
Inrush current	65 A
Inrush time	100 ms
Power Consumption	11 W
Power Factor (Fraction)	0.84
Connection	Screw connection with pug and socket
Cable	-
Number of products on MCB of 16 A type B 1	

Temperature

Ambient temperature range	-20 to +35 °C
---------------------------	---------------

Controls and Dimming

Dimmable	No
Driver/power unit/transformer	Power supply unit (On/Off)
Constant light output	Yes

Mechanical and Housing

Housing Material	Aluminum
Reflector material	-
Optic material	Acrylate
Optical cover material	Polymethyl methacrylate
Fixation material	Aluminum
Housing Color	Grey
Mounting device	Post-top for diameter 76 mm
Optical cover shape	Curved
Optical cover finish	Clear
Overall height	195 mm

Overall diameter	600 mm
Effective projected area	0.065 m ²

Approval and Application

Ingress protection code	IP66 [Dust penetration-protected, jet-proof]
Mech. impact protection code	IK10 [20 J vandal-resistant]
Surge Protection (Common/Differential)	Luminaire surge protection level until 6 kV differential mode and 6 kV common mode
Protection class IEC	Safety class I
Photobiological risk	Photobiological risk group 1 @200mm to EN62778

Initial Performance (IEC Compliant)

Luminous flux tolerance	+/-7%
Initial chromaticity	(0.330, 0.340) SDCM <7
Power consumption tolerance	+/-10%
Init. Color Rendering Index Tolerance	+/-2


Over Time Performance (IEC Compliant)

Driver failure rate at 5000 h	0.5 %
-------------------------------	-------

Product Data

Full product code	871794322804100
Order product name	BPP611 1400/CW PSU WRN CLO 76P L20
	SVP
Order code	912300025921
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	1
Material Nr. (12NC)	912300025921
Full product name	BPP611 1400/CW PSU WRN CLO 76P L20
	SVP
EAN/UPC - Case	8717943228041
EAN/UPC - Product/Case	8717943228041

Dimensional drawing

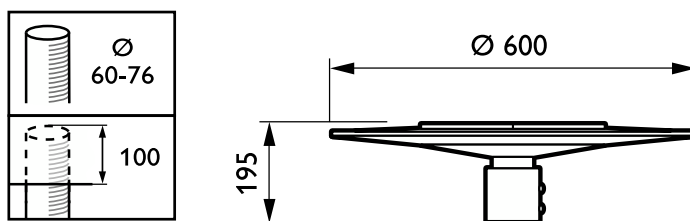

Stela+ gen2 Round

