



# Stela+ gen2 Round

BPP611 5650/CW PSU WRN CLO 76P L20 SVP

STELA-ROUND AREA GEN2, LED XP-G2, Power supply unit (On/Off), Wide road optic for S-class, Constant light output, Post-top for diameter 76 mm

Stela Round is at the forefront of LED technology in street lighting. The REVOLED cooling and light distribution concept enables tremendous energy savings and a corresponding reduction in CO2 emissions, whilst meeting current lighting standards. Excellent thermal management of the LEDs ensures a very long lifetime, eliminating the need for lamp replacement and resulting in a very attractive Total Cost of Ownership. The introduction of the latest-generation LED and programmable drivers and the possibility of employing Constant Light Output (CLO) in gen2 enable a further reduction in power consumption.

## Product data

General Information		EU RoHS compliant	
Lamp family code	XP-G2 [LED XP-G2]	Yes	
Light source replaceable	No		
Number of gear units	1 unit		
Driver included	Yes		
Light source engine type	LED		
Product family code	BPP611 [STELA-ROUND AREA GEN2]		
Lighting Technology	LED		
Embedded control	Constant light output		
CE mark	Yes		
Warranty period	5 years		
Flammability mark	-		
ENEC mark	-		
Light Technical			
Upward light output ratio	0		
Luminous Flux	5,085 lumen		
Standard tilt angle posttop	0°		
Standard tilt angle side entry	-		
Correlated Color Temperature (Nom)	5700 K		
Luminous Efficacy (rated) (Nom)	141 lm/W		
Color rendering index (CRI)	≥70		
Number of light sources	48		
Light source color	Cool white		
Optical cover type	Polymethyl methacrylate bowl/cover		
Luminaire light beam spread	154° x 118°		

## Stela+ gen2 Round

Optic type outdoor	Wide road optic for S-class
--------------------	-----------------------------

### Operating and Electrical

Input Voltage	220 to 240 V
Line Frequency	50 to 60 Hz
Initial CLO power consumption	35 W
Average CLO power consumption	35.5 W
End CLO power consumption	36 W
Inrush current	80 A
Inrush time	150 ms
Power Consumption	36 W
Power Factor (Fraction)	0.9
Connection	Screw connection with plug and socket
Cable	-
Number of products on MCB of 16 A type B 1	

### Temperature

Ambient temperature range	-20 to +35 °C
---------------------------	---------------

### Controls and Dimming

Dimmable	No
Driver/power unit/transformer	Power supply unit (On/Off)
Constant light output	Yes

### Mechanical and Housing

Housing Material	Aluminum
Reflector material	-
Optic material	Acrylate
Optical cover material	Polymethyl methacrylate
Fixation material	Aluminum
Housing Color	Grey
Mounting device	Post-top for diameter 76 mm
Optical cover shape	Curved
Optical cover finish	Clear
Overall height	195 mm

Overall diameter	600 mm
Effective projected area	0.065 m²

### Approval and Application

Ingress protection code	IP66 [Dust penetration-protected, jet-proof]
Mech. impact protection code	IK10 [20 J vandal-resistant]
Surge Protection (Common/Differential)	Luminaire surge protection level until 6 kV differential mode and 6 kV common mode
Protection class IEC	Safety class I
Photobiological risk	Photobiological risk group 1 @200mm to EN62778

### Initial Performance (IEC Compliant)

Luminous flux tolerance	+/-7%
Initial chromaticity	(0.330, 0.340) SDCM <7
Power consumption tolerance	+/-10%
Init. Color Rendering Index Tolerance	+/-2


### Over Time Performance (IEC Compliant)

Driver failure rate at 5000 h	0.5 %
-------------------------------	-------

### Product Data

Full product code	871794322805800
Order product name	BPP611 5650/CW PSU WRN CLO 76P L20 SVP
Order code	912300025922
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	1
Material Nr. (12NC)	912300025922
Full product name	BPP611 5650/CW PSU WRN CLO 76P L20 SVP
EAN/UPC - Case	8717943228058
EAN/UPC - Product/Case	8717943228058

## Dimensional drawing

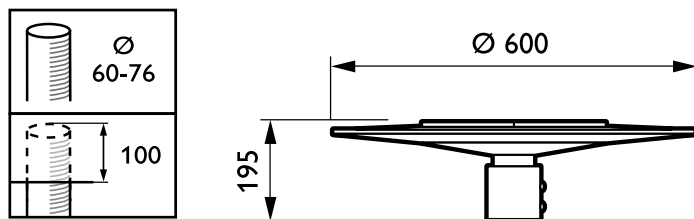

## Stela+ gen2 Round

