



# PureStyle Intelligent Color Powercore, RGBA



## PureStyle Intelligent Color Powercore, RGBA, 30° x 60°, 1219 mm (48 in), Medium Beam Angle

PureStyle Intelligent Color Powercore, RGBA, 30° x 60°, 1219 mm (48 in), Medium Beam Angle

Innovative PureStyle Powercore luminaires bring lighting professionals high output in a compact, easily concealed luminaire. PureStyle delivers exceptionally high-quality light for a wide range of interior applications from cove to wall-washing to backlighting and beyond. Here are just some of the powerful advantages that PureStyle brings to lighting professionals and their clients.

### Product data


General information		Mechanical and housing	
Light source color	RGBA	Housing Material	Aluminum extruded
Optic type	Medium beam	Length	1220 mm
Optical cover/lens type	Polycarbonate bowl/cover	Color	White
Luminaire light beam spread	30° x 60°	Approval and application	
CE mark	CE mark	Ingress protection code	IP20 [ Finger-protected]
UL mark	UL and cUL mark	Energy Efficiency Class	G
Operating and electrical		FCC mark	FCC Class B
Input Voltage	100 to 277 V	EPREL Registration Number	887779

# PureStyle Intelligent Color Powercore, RGBA

Initial performance (IEC compliant)	
Initial luminous flux (system flux)	1924 lm
Initial LED luminaire efficacy at RGB operation	39 lm/W
Initial input power	52 W
Over time performance (IEC compliant)	
Lumen Maintenance 50% at 25°C Calculated	72300
Lumen Maintenance 50% at 25°C Reported	47100
Lumen Maintenance 50% at 50°C Calculated	72300
Lumen Maintenance 50% at 50°C Reported	47100
Application conditions	
Ambient temperature range	-20 to +50 °C
Product data	
Full product code	871829139158699

Order product name	SA500X 30X60 RGBA L1220
EAN/UPC - Product	8718291391586
Order code	123-000026-04
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	912400133458
Net Weight (Piece)	1.847 kg
Catalog Number	123-000026-04
Catalog Number Description	PureStyle Intelligent Color Powercore, RGBA, 30° x 60°, 1219 mm (48 in), Medium Beam Angle

## Dimensional drawing

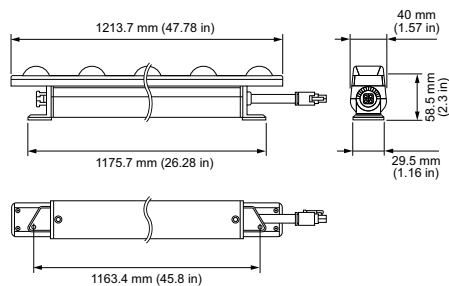

SA500X 30X60 RGBA L1220

