



# ColorBlast IntelliHue Powercore gen4



**ColorBlast IntelliHue Powercore gen4, 100 – 277 VAC, 10° Native (no spread lens), Gray Housing, UL/CE/CQC**

ColorBlast IntelliHue Powercore gen4, 100 – 277 VAC, 10° Native (no spread lens), Gray Housing, UL/CE/CQC

ColorBlast IntelliHue Powercore produces high-quality white, pastel, and saturated color light, in the same precisely controllable luminaire. IntelliHue technology delivers exceptional CRI and the ability to choose any CCT between 2000 K and 10000 K. ColorBlast IntelliHue Powercore offers a range of accessories that allow for customizable beam angles for floodlighting, spotlighting, wall washing, and grazing, along with the efficiency and cost-effectiveness of Powercore technology in a rugged die-cast aluminium housing.

## Product data

General information			
Beam angle of light source	10 °	CE mark	CE mark
Light source color	IntelliHue	ENEC mark	ENEC mark
Light source replaceable	No	UL mark	UL and cUL mark
Number of gear units	1 unit	Optic type outdoor	Narrow beam angle 10°
Driver/power unit/transformer	-	Constant light output	No
Driver included	Yes	WEEE mark	-
Optical cover/lens type	Tempered glass	Accessory PFC	ZCP485
Luminaire light beam spread	10°	Light technical	
Cable	Cable 1.8 m without plug	CRI @ 4000 K	86.2
Protection class IEC	Safety class I		

ColorBlast IntelliHue Powercore gen4

Operating and electrical	
Input Voltage	100 to 277 V
Input Frequency	50 to 60 Hz
Power Factor (Nom)	-

Controls and dimming	
Dimmable	Yes

Mechanical and housing	
Housing Material	Aluminum die cast
Optic material	Glass
Optical cover/lens material	Tempered glass
Optical cover/lens shape	Flat
Optical cover/lens finish	Clear
Color	Gray

Approval and application	
Ingress protection code	IP66 [ Dust penetration-protected, jet-proof]
Energy Efficiency Class	G
Mech. impact protection code	IK10 [ 20 J vandal-resistant]
Vibration Standard	Complies with ANSI C136.31, 3G
Corrosion Resistance	Complies with ASTM B117 standard for > 1,500 hours
Vibration Rating	Complies with ANSI C136.31, 3G
EPREL Registration Number	887767

Initial performance (IEC compliant)	
Initial luminous flux (system flux)	2434 lm
Initial LED luminaire efficacy	50.8 lm/W
Init. Color Rendering Index	80
Initial input power	50 W

Over time performance (IEC compliant)	
Lumen Maintenance 50% at 25°C Calculated	90300
Lumen Maintenance 50% at 25°C Reported	54000


Lumen Maintenance 50% at 50°C Calculated	90300
Lumen Maintenance 50% at 50°C Reported	54000
Lumen Maintenance 70% at 25°C Calculated	46100
Lumen Maintenance 70% at 25°C Reported	46100
Lumen Maintenance 70% at 50°C Calculated	46100
Lumen Maintenance 70% at 50°C Reported	46100
Lumen Maintenance 80% at 25°C Calculated	28600
Lumen Maintenance 80% at 25°C Reported	28600
Lumen Maintenance 80% at 50°C Calculated	28600
Lumen Maintenance 80% at 50°C Reported	28600
Lumen Maintenance 90% at 25°C Calculated	13100
Lumen Maintenance 90% at 25°C Reported	13100
Lumen Maintenance 90% at 50°C Calculated	13100
Lumen Maintenance 90% at 50°C Reported	13100

Application conditions	
Ambient temperature range	-40 to +50 °C

Product data	
Full product code	871829138839599
Order product name	BCP483 36xLED-HB/RGBMW 100-277V 10 GR
EAN/UPC - Product	8718291388395
Order code	423-000011-04
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	2
Material Nr. (12NC)	912400133545
Net Weight (Piece)	4.146 kg
Catalog Number	423-000011-04
Catalog Number Description	ColorBlast IntelliHue Powercore gen4, 100 – 277 VAC, 10° Native (no spread lens), Gray Housing, UL/CE/CQC



Dimensional drawing

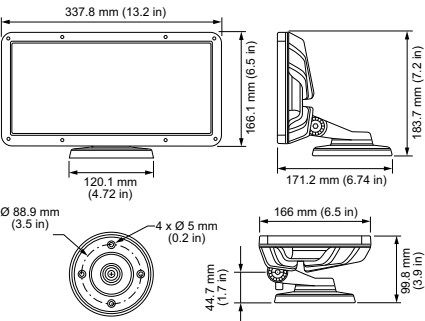

BCP483 36xLED-HB/RGBMW 100-277V 10 GR

## ColorBlast IntelliHue Powercore gen4

