



eW Blast Powercore gen4



eW Blast Powercore gen4, 2700 K, 100 – 277 VAC, 6° Native (no spread lens), Black housing

eW Blast Powercore gen4, 2700 K, 100 – 277 VAC, 6° Native (no spread lens), Black housing

eW Blast Powercore gen4 high-performance LED luminaires provide a high-intensity wash of white light with simplified installation. eW Blast Powercore gen4 offers a range of accessories that allow for customizable beam angles for floodlighting, spotlighting, wall washing, and grazing, along with the efficiency and cost-effectiveness of Powercore technology in a rugged die-cast aluminium housing.

Product data

General information		Optic type outdoor	
Lamp family code	LED-HB [LED High Brightness]	Constant light output	Narrow beam angle 6°
Light source color	White	Accessory PFC	Yes
Light source replaceable	No		ZCP485
Number of gear units	1 unit	Operating and electrical	
Driver/power unit/transformer	Power supply unit with DMX interface	Input Voltage	100 to 277 V
Optical cover/lens type	Clear flat	Input Frequency	50 to 60 Hz
Luminaire light beam spread	6°	Power Factor (Nom)	0.9
Protection class IEC	Safety class I	Controls and dimming	
CE mark	CE mark	Dimmable	Yes
UL mark	UL and cUL mark	Mechanical and housing	
Lifetime to 50% luminous flux	100000 h	Housing Material	Aluminum die cast
Lifetime to 70% luminous flux	84000 h		
Lifetime to 90% luminous flux	28000 h		

eW Blast Powercore gen4

Optic material	Glass
Optical cover/lens material	Tempered glass
Fixation material	Aluminum
Mounting device	Baseplate
Optical cover/lens shape	Flat
Optical cover/lens finish	Clear
Color	Black

Approval and application

Ingress protection code	IP66 [Dust penetration-protected, jet-proof]
Energy Efficiency Class	G
Mech. impact protection code	IK10 [20 J vandal-resistant]
Vibration Standard	Complies with ANSI C136.31, 3G
Corrosion Resistance	Complies with ASTM B117 standard for > 1,500 hours
FCC mark	FCC Class B
Vibration Rating	Complies with ANSI C136.31, 3G
EPREL Registration Number	915338

Initial performance (IEC compliant)

Init. Corr. Color Temperature	2700 K
Initial input power	50 W

Over time performance (IEC compliant)

Lumen Maintenance 50% at 25°C Calculated	100000
Lumen Maintenance 50% at 25°C Reported	51000
Lumen Maintenance 50% at 50°C Calculated	100000
Lumen Maintenance 50% at 50°C Reported	51000

Lumen Maintenance 70% at 25°C Calculated	84000
Lumen Maintenance 70% at 25°C Reported	51000
Lumen Maintenance 70% at 50°C Calculated	83000
Lumen Maintenance 70% at 50°C Reported	51000
Lumen Maintenance 90% at 25°C Calculated	28000
Lumen Maintenance 90% at 25°C Reported	28000
Lumen Maintenance 90% at 50°C Calculated	27000
Lumen Maintenance 90% at 50°C Reported	28000

Application conditions


Ambient temperature range	-40 to +50 °C
---------------------------	---------------

Product data

Full product code	871829139288099
Order product name	BCP481 36xLED-HB/2700K 100-277V BK
EAN/UPC - Product	8718291392880
Order code	523-000100-01
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	2
Material Nr. (12NC)	912400134973
Net Weight (Piece)	4.146 kg
Catalog Number	523-000100-01
Catalog Number Description	eW Blast Powercore gen4, 2700 K, 100 – 277 VAC, 6° Native (no spread lens), Black housing



Dimensional drawing

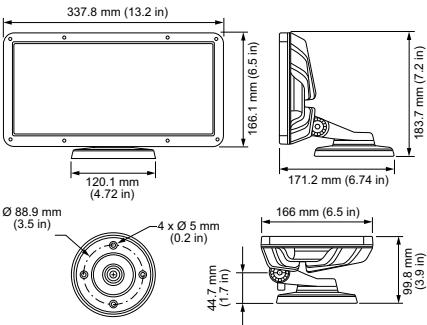

BCP481 36xLED-HB/2700K 100-277V BK

eW Blast Powercore gen4

