



# Flow LED

## BGP490 LED21 I D9 VP

LED module 2100 lm, 840 neutral white, Power supply unit with DALI interface, Safety class I, Distribution symmetrical

Specially designed for slow-traffic underpass lighting, Flow LED combines elegance and style with high-performance LED lighting. Equipped with the newest Fortimo LED Line units, it easily outperforms conventional fluorescent fixtures.

### Product data

| General Information                |                            |
|------------------------------------|----------------------------|
| Lamp family code                   | LED21 [LED module 2100 lm] |
| Light source replaceable           | Yes                        |
| Number of gear units               | 1 unit                     |
| Driver included                    | Yes                        |
| Light source engine type           | LED                        |
| Service tag                        | No                         |
| Lighting Technology                | LED                        |
| CE mark                            | Yes                        |
| Warranty period                    | 3 years                    |
| Flammability mark                  | -                          |
| ENEC mark                          | ENEC mark                  |
| EU RoHS compliant                  | Yes                        |
| Light Technical                    |                            |
| Upward light output ratio          | 0                          |
| Luminous Flux                      | 2,100 lm                   |
| Standard tilt angle posttop        | -                          |
| Standard tilt angle side entry     | -                          |
| Correlated Color Temperature (Nom) | 4000 K                     |

| Luminous Efficacy (rated) (Nom)          | 100 lm/W                     |
|--|------------------------------|
| Color rendering index (CRI)              | 80                           |
| Light source color                       | 840 neutral white            |
| Optical cover type                       | Polycarbonate opal satinized |
| Luminaire light beam spread              | 120°                         |
| Optic type outdoor                       | Distribution symmetrical     |
| Operating and Electrical                 |                              |
| Input Voltage                            | 200 to 240 V                 |
| Line Frequency                           | 50 to 60 Hz                  |
| Inrush current                           | 26 A                         |
| Inrush time                              | 140 ms                       |
| Power Consumption                        | 21 W                         |
| Power Factor (Fraction)                  | 0.9                          |
| Connection                               | Internal connector           |
| Cable                                    | -                            |
| Number of products on MCB of 16 A type B | 36                           |

# Flow LED


| Temperature               |               |
|---------------------------|---------------|
| Ambient temperature range | -20 to +40 °C |

| Controls and Dimming          |                                       |
|-------------------------------|---------------------------------------|
| Dimmable                      | Yes                                   |
| Driver/power unit/transformer | Power supply unit with DALI interface |
| Control interface             | DALI                                  |
| Constant light output         | Programmable                          |

| Mechanical and Housing              |                             |
|-------------------------------------|-----------------------------|
| Housing Material                    | Aluminum extruded           |
| Reflector material                  | Aluminum                    |
| Optic material                      | -                           |
| Optical cover material              | Polycarbonate               |
| Fixation material                   | Stainless steel             |
| Housing Color                       | White                       |
| Mounting device                     | Heavy-duty mounting bracket |
| Optical cover shape                 | Curved                      |
| Optical cover finish                | Opal                        |
| Overall length                      | 705 mm                      |
| Overall width                       | 260 mm                      |
| Overall height                      | 71 mm                       |
| Effective projected area            | 0.18 m <sup>2</sup>         |
| Dimensions (Height x Width x Depth) | 71 x 260 x 705 mm           |

| Approval and Application               |  |
|--|--|
| Ingress protection code                | IP65 [Dust penetration-protected, jet-proof] |
| Mech. impact protection code           | IK10 [20 J vandal-resistant]                 |
| Surge Protection (Common/Differential) | 2 kV   |
| Protection class IEC                   | Safety class I                               |

## Dimensional drawing

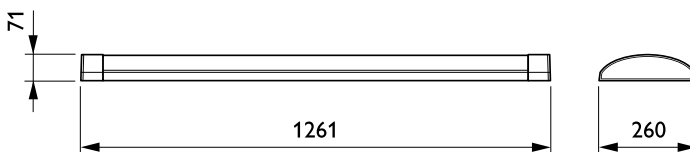

| Initial Performance (IEC Compliant)   |                       |
|---------------------------------------|-----------------------|
| Luminous flux tolerance               | +/-10%                |
| Initial chromaticity                  | (0.380, 0.377) SDCM<3 |
| Power consumption tolerance           | +/-10%                |
| Init. Color Rendering Index Tolerance | +/-2                  |

| Over Time Performance (IEC Compliant)                    |       |
|--|-------|
| Driver failure rate at 5000 h                            | 0.1 % |
| Control gear failure rate at median useful life 100000 h | 10 %  |
| Lumen maintenance at median useful life* 50000 h         | L80   |

| Application Conditions             |       |
|------------------------------------|-------|
| Performance ambient temperature Tq | 25 °C |
| Maximum dim level                  | 50%   |

| Product Data                    |                      |
|---------------------------------|----------------------|
| Order product name              | BGP490 LED21 I D9 VP |
| Full product name               | BGP490 LED21 I D9 VP |
| Full product code               | 871869938527900      |
| Order code                      | 38527900             |
| Material Nr. (12NC)             | 912401483148         |
| Numerator - Quantity Per Pack   | 1                    |
| EAN/UPC - Product/Case          | 8718699385279        |
| Numerator - Packs per outer box | 1                    |
| EAN/UPC - Case                  | 8718699385279        |

## Flow LED

