



F-can (72C)

F-CAN HID MH BAL 50W M110 120/277V FCAN

The Philips Advance line of F-can HID ballasts comes in two dual-voltage configurations for the US and Canadian market. Ballasts for these luminaires are most often encased and potted in fluorescent ballast type cans.

Product data

| General Information | |
|--------------------------|------------------|
| ANSI Code | M110(PULSESTART) |
| Lamp Type | 50W MH |
| Number of Lamps | 1 piece/unit |
| Circuit Type | HX-HPF |
| Ballast Type | Magnetic HID |
| Base Model | 72C5181 |
| Suitable For Outdoor Use | Yes |
| Ignitor Catalog Number | Inside Can |
| Capacitor Catalog Number | Inside Can |
| Automatic Restart | No |

| Operating and Electrical | |
|---------------------------------|---------------------|
| Input Voltage | 120/277 V |
| Input Frequency | 60 Hz |
| Input Current (Open Circuit) | 1.15/0.5 A |
| Input Current (Starting) | 0.8/0.35 A |
| Input Current (Short Circuit) | 0.25-0.45/0.1-0.2 A |
| Secondary Short Circuit Current | 0.7-0.85 A |
| Constant Wattage Deviation | 10% |
| Ballast Factor (Nom) | 1 |
| Power Factor (Nom) | 0.90 |
| Open Circuit Voltage | 254 V |
| Input Current (Nom) | 0.65/0.3 A A |

| | |
|-------------------|------|
| Input Power (Nom) | 72 W |
| Rated Lamp Power | 50 W |

| Wiring | |
|---|----------|
| Wire Striplength | 0.5 mm |
| Wire Length by Color | 12" |
| Wire Type | Stranded |
| Remote Wiring Configuration Allowed | Yes |
| Max Ballast-Lamp Distance Remote Wiring | 25' |
| Recommended Fuse Value | 3/2 A |

| Mechanical and Housing | |
|------------------------|---------------------|
| Housing Material | Metal |
| Housing | F-Can |
| Housing Dimensions | 11.75 x 2.63 x 3.19 |


| Approval and Application | |
|-----------------------------------|-------------------------------|
| Open Circuit Voltage Test (Volts) | 230-280 V |
| Approval Marks | UL certificate RoHS Compliant |
| Temperature Marking | 90°C max. case |
| UL Recognized | No |
| Hipot Test (1 Minute) | 1600 V |
| Hipot Test (2 Seconds) | 2000 V |
| UL Insulation Class | A(105°C) |

F-can (72C)

| | |
|---------------------|--|
| UL Temperature Code | NA |
| Product Data | |
| Order product name | F-CAN HID MH BAL 50W M110 120/277V FCAN |
| EAN/UPC - Product | 781087251812 |
| Order code | 913700579609 |

| | |
|---------------------------------|--------------|
| Numerator - Quantity Per Pack | 1 |
| Numerator - Packs per outer box | 4 |
| Material Nr. (12NC) | 913700579609 |
| Net Weight (Piece) | 3.461 kg |

Dimensional drawing

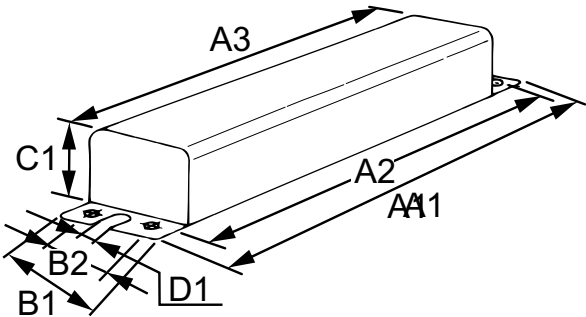

| Product | A1 | A2 | A3 | B1 | B2 | C1 | D1 |
|---------------------|-------|----------|---------|--------|--------|--------|--------|
| F-CAN HID 72C5181NP | 12 in | 11.13 in | 10.5 in | 3.9 in | 2.0 in | 2.6 in | 0.3 in |

MH BAL 50W M110 120/277V FCAN

