



# Centium T5

## CENTIUM ELE BALLAST (3) F14T5 120-277V

Philips Advance Centium ballasts for T5 lamps at 120-277V are now available with our industry leading N-can at 9.5" x 1.3" x 1.0" or T-can at 14.17" x 1.18" x 1.06", which provides fixture manufacturers increased versatility in their newer generation fixture designs. These ballasts are compatible with all major energy-saving T5 linear lamps and have a variety of other features which makes them ideal for a variety of applications. The ballasts' programmed start ignition provides extended lamp life in frequent switching applications such as those where occupancy sensors are being used. They also feature lamp End-Of-Life (EOL) protection circuitry which safely removes power from the lamp at the end of lamp life.

### Product data


General Information		Input Current (Min)	
Lamp Type	F14T5	Input Power (Nom)	50-50 W
Number of Lamps	2/3 piece/unit	Rated Lamp Power	14 W
Ballast Type	Electronic Fluorescent	Wiring	
Base Model	ICN3S14T	Color Input Terminals	BLK & WHT
Suitable For Outdoor Use	Yes	Color Output Terminals	RED, YEL, BLU & BLU/WHT
Automatic Restart	Yes	Wire Striplength	0.375 mm
Operating and Electrical		Lamp Connection	Series
Input Voltage	120 to 277 V	Wire Length by Color	No wires
Input Frequency	50 to 60 Hz	Wire Gauge (Nom)	18AWG mm
Total Harmonic Distortion USA	10 %	Wire Type	Solid
Ignition Method	Programmed Start	Remote Wiring Configuration Allowed	No
Crestfactor (Nom)	1.7	Tandem Wiring Configuration Allowed	No
Ignition Time (Nom)	1.5 s	Through Wiring Configuration Allowed	No
Ballast Factor (Nom)	1	Max Ballast-Lamp Distance Remote Wiring	No Remote
Power Factor (Nom)	0.98	Max Ballast-Lamp Distance Tandem Wiring	No Tandem
Input Current (Max)	0.42 A	Max Ballast-Lamp Distance Through Wiring	No Through

## Centium T5

Connector Type	Poke-In
<b>Temperature</b>	
T-Case Maximum (Nom)	70 °C
<b>Mechanical and Housing</b>	
Housing Material	Metal
Housing	T
Housing Dimensions	14.17" x 1.18" x 1.06"
<b>Approval and Application</b>	
EMC Immunity Standard	FCC Non-Consumer
Approval Marks	CSA certificate UL certificate RoHS Compliant

Hum And Noise Level	A
UL Recognized	No
<b>Product Data</b>	
Order product name	CENTIUM ELE BALLAST (3) F14T5 120-277V
EAN/UPC - Product	781087131848
Order code	502591
Local order code	502591
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	18
Material Nr. (12NC)	913701253502
Net Weight (Piece)	441.000 g

### Dimensional drawing

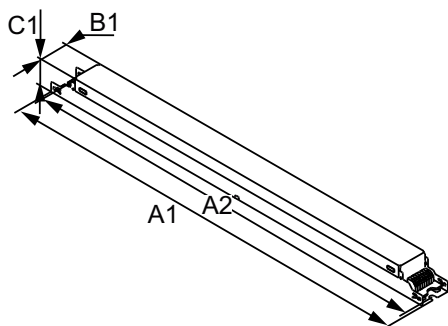

Product	A1	A2	B1	C1
CENTIUM ELE BALLAST (3) F14T5 120-277V	14.17 in	13.78 in	1.18 in	1.06 in

ELE BALLAST (3) F14T5 120-277V

