



HF-Selectalume II for TL-D lamps

HF-S 258 TL-D II 220-240V 50/60Hz

HF-Selectalume II is the most cost-effective, reliable, slim and affordable fluorescent solution, with highly disruptive technology for energy saving, system flexibility and unsurpassed performance. The cost-saving HF-Selectalume II has a robust design which meets all relevant international safety and performance standards. HF-Selectalume II is intended for use with indoor lighting fixtures such as spotlights, downlights and recessed luminaires, which are largely used in office, retail, industry, hotel, restaurant and other applications where control devices are installed with occasional On/Off switching activity

Product data



Operating and Electrical		T-Case Lifetime (Nom)	
Input Voltage	220 to 240 V	75 °C	
Line Frequency	50 to 60 Hz	T-Case Maximum (Max)	
Input Frequency	50 to 60 Hz	75 °C	
Earth Leakage Current (Max)	0.5 mA	Mechanical and Housing	
Inrush Current Width	0.35 ms	Housing	
Inrush Current Peak (Max)	28 A	L 280x30x28	
Number of Products on MCB (16A Type B) (Nom)	12	Approval and Application	
Wiring		Ingress protection code	IP20 [Finger-protected]
Connector Type Input Terminals	WAGO 744 connector	Energy Efficiency Index	A2 BAT
Connector Type Output Terminals	WAGO 744 connector [Suitable for manual wiring]	Approval Marks	F-Marking CE marking ENEC certificate CCC certificate C-Tick certificate PSB certification TISI marking SIRIM approval CB Certificate CCC certificate VDE-EMV certificate
Temperature		Product Data	
Ambient temperature range	-20 °C to 50 °C	Order product name	HF-S 258 TL-D II 220-240V 50/60Hz
		Full product name	HF-S 258 TL-D II 220-240V 50/60Hz

HF-Selectalume II for TL-D lamps

Full product code	872790089746300
Order code	913713032566
Material Nr. (12NC)	913713032566
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8711500999085

Numerator - Packs per outer box	12
EAN/UPC - Case	8727900897463

Dimensional drawing

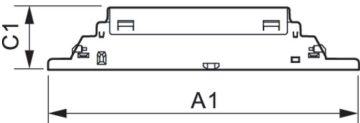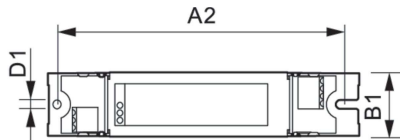

Product	D1	C1	A1	A2	B1
HF-S 258 TL-D II 220-240V 50/60Hz	4.1 mm	28.0 mm	280.0 mm	265.0 mm	30.0 mm

