



# **Double Ended Linear**

# BC300T3Q/CL/2CD/TP

High-quality white light with superior lumen performance. Halogen Double Ended lamps provide bright, white light for work lights and security lighting. Rugged construction for busy work sites. Offered in several lengths to meet most application needs. High lumen output provides light where you need it.

#### **Product data**


General Information					
Cap-Base	R7S [R7s]				
Operating Position	UNIVERSAL [Any or Universal (U)]				
Nominal lifetime	2,000 hour(s)				
Rated Lifetime (Hours)	2,000 hour(s)				
Lighting Technology	Halogen				
Light Technical					
Luminous Flux	5,200 lm				
Luminous Efficacy (rated) (Nom)	17.3 lm/W				
Color rendering index (CRI)	100				
Operating and Electrical					
Power Consumption	300 W				
Lamp Current (Nom)	2.50 A				
Starting Time (Nom)	0.0 s				
Voltage (Nom)	120 V				

Voltage (Nom)	120 V		
Mechanical and Housing			
Bulb Finish	Clear		
Bulb Shape	T3 [T 12mm (T3)]		
Product Data			
Order product name	BC300T3Q/CL/2CD/TP		
Full product name	BC300T3Q/CL/2CD/TP		
Order code	924735234596		
Material Nr. (12NC)	924735234596		
Numerator - Quantity Per Pack	1		
EAN/UPC - Product/Case	067805011822		
Numerator - Packs per outer box	12		
EAN/UPC - Case	50067805011827		

Datasheet, 2023, September 21 data subject to change

## **Double Ended Linear**

### Dimensional drawing

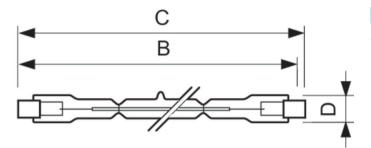

Product	D (max)	B (max)	В	B (min)	C (max)
BC300T3Q/CL/2CD/TP	12 mm	115.8 mm	114.2 mm	112.6 mm	117.6 mm



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.