



Double Ended Linear

BC500T3Q/CL 130V 6/2

High-quality white light with superior lumen performance. Halogen Double Ended lamps provide bright, white light for work lights and security lighting. Rugged construction for busy work sites. Offered in several lengths to meet most application needs. High lumen output provides light where you need it.

Product data


General Information			
Cap-Base	R7S [R7s]		
Operating Position	UNIVERSAL [Any or Universal (U)]		
Nominal lifetime	2,000 hour(s)		
Rated Lifetime (Hours)	2,000 hour(s)		
Lighting Technology	Halogen		
Light Technical			
Luminous Flux	9,200 lm		
Correlated Color Temperature (Nom)	2900 K		
Luminous Efficacy (rated) (Nom)	18.4 lm/W		
Color rendering index (CRI)	100		
Operating and Electrical			
Power Consumption	500 W		
Lamp Current (Nom)	3.94 A		
Starting Time (Nom)	0.0 s		
Voltage (Nom)	127 V		
	127 V		

Controls and Dimming		
Dimmable	Yes	
Mechanical and Housing		
Bulb Finish	Clear	
Bulb Shape	T3 [T 12mm (T3)]	
Product Data		
Order product name	BC500T3Q/CL 130V 6/2	
Full product name	BC500T3Q/CL 130V 6/2	
Order code	924735535892	
Material Nr. (12NC)	924735535892	
Numerator - Quantity Per Pack	1	
EAN/UPC - Product/Case	046677415709	
Numerator - Packs per outer box	6	
EAN/UPC - Case	50046677415704	

Datasheet, 2023, September 4 data subject to change

Double Ended Linear

Dimensional drawing

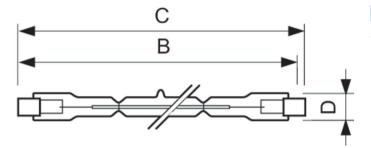

Product	D (max)	B (max)	В	B (min)	C (max)
BC500T3O/CL 130V 6/2	12 mm	115.8 mm	114.2 mm	112.6 mm	117.6 mm



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.