# **PHILIPS** Lighting



# **MASTER PL-L 4 Pin**

## MASTER PL-L 40W/840/4P 1CT/25

Energy-saving compact fluorescent lamps. Compact long-arc low-pressure mercury discharge lamp. Envelope consists of 2 parallel fluorescent tubes

#### Warnings and Safety

- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied control gear
- · Shorter lamp life when often switching and not well pre-heated electrodes
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

#### **Product data**


General Information		Lamp Current (Nom)	0.320 A
Cap-Base	2G11		
Flux measurement reference	Sphere	Controls and Dimming	
		Dimmable	Yes
Light Technical			
Color Code	840 [CCT of 4000K]	Approval and Application	
Luminous Flux	3,500 lm	Energy Efficiency Class	G
Color Designation	Cool White (CW)	Mercury (Hg) Content (Max)	2 mg
Chromaticity Coordinate X (Nom)	0.38	Mercury (Hg) Content (Nom)	2.0 mg
Chromaticity Coordinate Y (Nom)	0.38	Energy Consumption kWh/1000 h	40 kWh
Correlated Color Temperature (Nom)	4000 K	EPREL Registration Number	423312
Luminous Efficacy (rated) (Nom)	88 lm/W		
Color rendering index (CRI)	80	Product Data	
		Order product name	MASTER PL-L 40W/840/4P 1CT/25
Operating and Electrical		Full product name	MASTER PL-L 40W/840/4P 1CT/25
Power Consumption	40.0 W	Full product code	871150061097340
		Order code	927908208470

### MASTER PL-L 4 Pin

Material Nr. (12NC)	927908208470			
Local order code	PLL40W8404P			
Numerator - Quantity Per Pack	1			
EAN/UPC - Product/Case	8711500610973			


Numerator - Packs per outer box	25
EAN/UPC - Case	8711500610980

#### Dimensional drawing



Product	D (max)	D1 (max)	A (max)	B (max)	C (max)
MASTER PL-L 40W/840/4P 1CT/25	39.0 mm	18.0 mm	509.2 mm	535 mm	541.6 mm

#### Photometric data

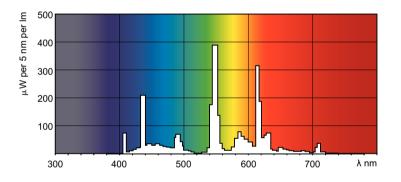

Spectral Power Distribution Colour - MASTER PL-L 40W/840/4P 1CT/25



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2023, April 17 - data subject to change