MASTER PL-T TOP 4 Pin

MASTER PL-T TOP 57W/840/4P 1CT/5X10CC

Energy saving compact fluorescent lamp. Compact long-arc low-pressure mercury discharge lamp. Envelope consists of 6 parallel narrow fluorescent tubes. Amalgam controlled operation

Warnings and Safety

- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied HF control gear
- Shorter lamp life when often switching and not well pre-heated electrodes
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information	
Cap base	GX24Q-5 [GX24q-5]
Flux measurement reference	Sphere

Light Technical	
Colour Code	840 [CCT of 4000K]
Luminous Flux	4,000 lm
Colour designation	Cool White (CW)
Chromaticity Coordinate X (Nom)	0.38
Chromaticity Coordinate Y (Nom)	0.38
Correlated Colour Temperature	4000 K
Luminous efficacy (rated) (min.)	76 lm/W
Colour rendering index (CRI)	80

Operating and Electrical	
Power Consumption	57.0 W
Lamp current (nom.)	0.320 A

Controls and Dimming	
Dimmable	Yes

Approval and Application	
Energy Efficiency Class	G
Mercury (Hg) content (max.)	1.4 mg
Mercury (Hg) content (nom.)	1.4 mg
Energy consumption kWh/1,000 hours	57 kWh
EPREL registration number	423334

MASTER PL-T TOP 4 Pin

Product Data	
Order product name	MASTER PL-T TOP 57W/840/4P 1CT/5X10BOX
Full product name	MASTER PL-T TOP 57W/840/4P 1CT/5X10CC
Full EOC	871150061034870
Order code	61034870
Material no. (12 NC)	927912484069
Local order code	57PLT8404PINTOP

SAP numerator – quantity per pack	1
EAN/UPC — Product/Case	8711500610348
Numerator – packs per outer box	50
EAN/UPC - Case	8711500610409

Dimensional drawing



Product	D (max)	A (max)	B (max)	C (max)
MASTER PL-T TOP 57W/840/4P 1CT/5X10BOX	41 mm	157.7 mm	182.0 mm	197.7 mm

Photometric data

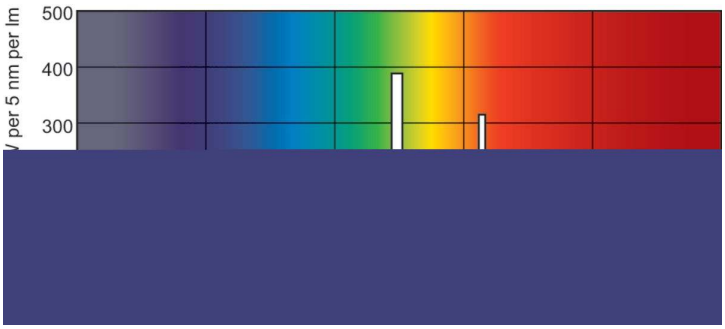

Spectral Power Distribution Colour - MASTER PL-T TOP 57W/840/4P 1CT/5X10BOX

MASTER PL-T TOP 4 Pin

Lifetime

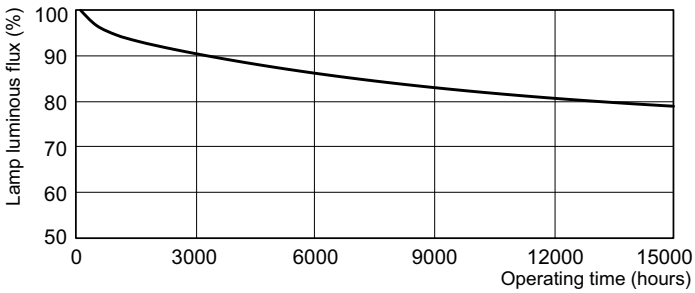

Lumen Maintenance Diagram - MASTER PL-T TOP 57W/840/4P 1CT/5X10BOX

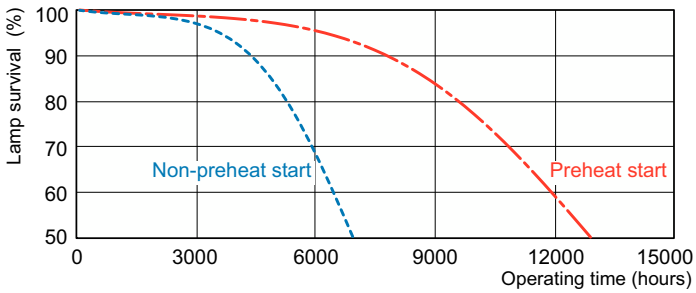

Life Expectancy Diagram - MASTER PL-T TOP 57W/840/4P 1CT/5X10BOX

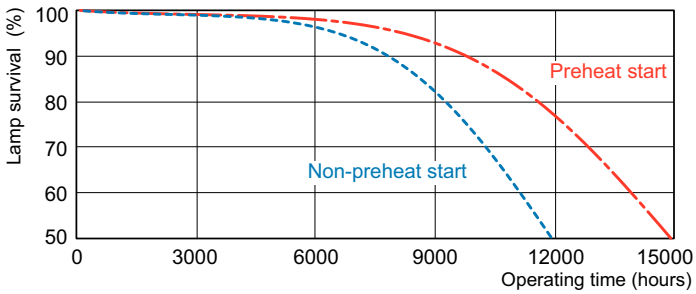

Life Expectancy Diagram - MASTER PL-T TOP 57W/840/4P 1CT/5X10BOX

© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.