



# MASTER TL-D Super 80



# MASTER TL-D Super 80 58W/835 1SL/25

The MASTER TL-D Super 80 lamp offers more lumens per watt and better color rendering than TL-D standard colors. Furthermore, it has a lower mercury content. The lamp can be operated in existing TL-D luminaires.

### **Warnings and Safety**

• A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### **Product data**

General Information					
Cap-Base	G13 [Medium Bi-Pin Fluorescent]				
Flux measurement reference	Sphere				
Life to 50% Failures (Nom)	15,000 hour(s)				
Light Technical					
Color Code	835 [CCT of 3500K]				
Luminous Flux	5,240 lm				
Color Designation	White (WH)				
Chromaticity Coordinate X (Nom)	0.409 0.394				
Chromaticity Coordinate Y (Nom)					
Correlated Color Temperature (Nom)	3500 K				
Luminous Efficacy (rated) (Nom)	90 lm/W				
Color rendering index (CRI)	81				
Operating and Electrical					
Power Consumption	59.4 W				

Lamp Current (Nom)	0.670 A			
Controls and Dimming				
Dimmable	Yes			
Mechanical and Housing				
Bulb Shape	T8			
Approval and Application				
Energy Efficiency Class	G			
Mercury (Hg) Content (Nom)	1.7 mg			
Energy Consumption kWh/1000 h	60 kWh			
EPREL Registration Number	423396			
Product Data				
Order product name	MASTER TL-D Super 80 58W/835 1SL/25			
Full product name	me MASTER TL-D Super 80 58W/835 1SL/25			


Datasheet, 2024, February 8 data subject to change

# **MASTER TL-D Super 80**

Full product code	871150063216640 927922083523		
Order code			
Material Nr. (12NC)	927922083523		
Numerator - Quantity Per Pack	1		
EAN/UPC - Product/Case	8711500632166		


Numerator - Packs per outer box	25
EAN/UPC - Case	8711500643490

### Dimensional drawing




Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL-D Super 80	28 mm	1,500.0 mm	1,507.1 mm	1,504.7 mm	1,514.2 mm
58W/835 1SL/25					


### Photometric data

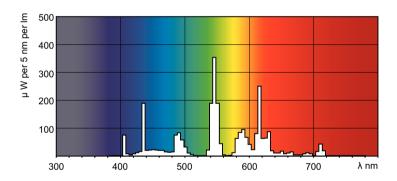

Spectral Power Distribution Colour - MASTER TL-D Super 80 58W/835 1SL/25

### Lifetime

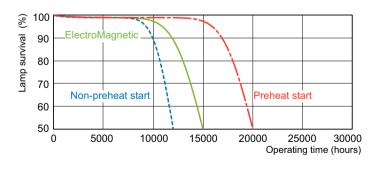

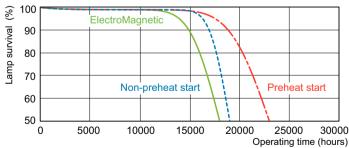


Life Expectancy Diagram - MASTER TL-D Super 80 58W/835 1SL/25

Life Expectancy Diagram - MASTER TL-D Super 80 58W/835 1SL/25

# **MASTER TL-D Super 80**

### Lifetime

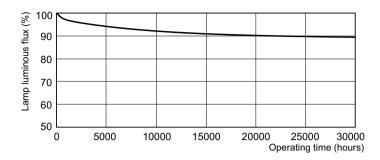

Lumen Maintenance Diagram - MASTER TL-D Super 80 58W/835 1SL/25

