



# MASTER TL5 High Efficiency

## MASTER TL5 HE 14W/865 UNP/40

Low-pressure mercury discharge lamps with a tubular 16 mm envelope

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


### Product data

General Information	
Cap base	G5 [G5]
Features	na [Not Applicable]
Light Technical	
Colour Code	865 [CCT of 6500K]
Luminous Flux	1,250 lm
Colour designation	Cool Daylight
Correlated Colour Temperature	6500 K
Luminous efficacy (rated) (nom.)	80 lm/W
Colour rendering index (CRI)	82
Operating and Electrical	
Power Consumption	14 W
Lamp current (nom.)	0.165 A
Controls and Dimming	
Dimmable	Yes

Mechanical and Housing	
Bulb shape	T5 [16 mm (T5)]
Approval and Application	
Mercury (Hg) content (nom.)	1.2 mg
Energy consumption kWh/1,000 hours	15 kWh
Product Data	
Order product name	MASTER TL5 HE 14W/865 UNP/40
Full product name	MASTER TL5 HE 14W/865 UNP/40
Full EOC	871150061068355
Order code	61068355
Material no. (12 NC)	927926086518
Local order code	14865IP
SAP numerator – quantity per pack	1
EAN/UPC – Product/Case	8711500610683
Numerator – packs per outer box	40
EAN/UPC – Case	8711500634368


# MASTER TL5 High Efficiency

## Dimensional drawing

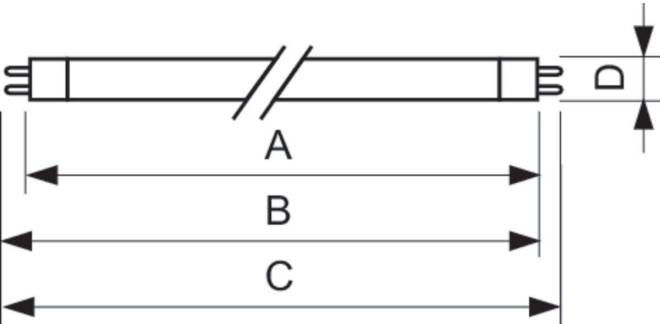


Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL5 HE 14W/865 UNP/40	17 mm	549.0 mm	556.1 mm	553.7 mm	563.2 mm

## Photometric data

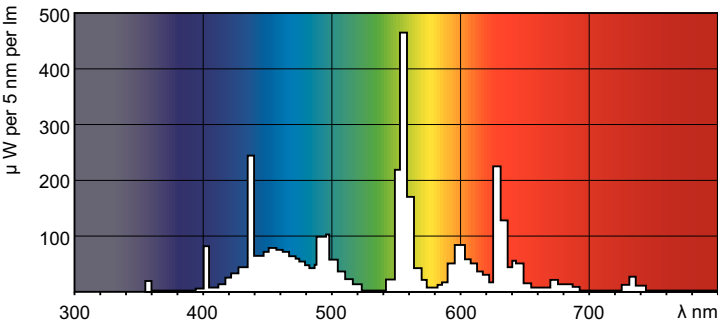


Spectral Power Distribution Colour - MASTER TL5 HE 14W/865 UNP/40

## Lifetime

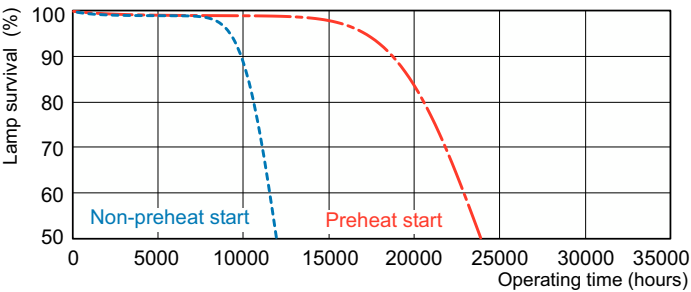

Life Expectancy Diagram - MASTER TL5 HE 14W/865 UNP/40

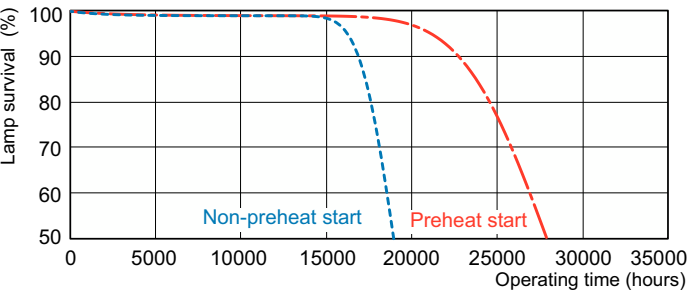

Life Expectancy Diagram - MASTER TL5 HE 14W/865 UNP/40

MASTER TL5 High Efficiency

Lifetime



Lumen Maintenance Diagram - MASTER TL5 HE 14W/865 UNP/40

