



MASTER TL5 High Output

MASTER TL5 HO 39W/865 SLV/40

Low-pressure mercury discharge lamps with a tubular 16 mm envelope

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information	
Cap-Base	G5 [G5]
Features	na [Not Applicable]
Flux measurement reference	Sphere
Light Technical	
Color Code	865 [CCT of 6500K]
Luminous Flux	2,875 lm
Color Designation	Cool Daylight
Chromaticity Coordinate X (Nom)	0.313
Chromaticity Coordinate Y (Nom)	0.337
Correlated Color Temperature (Nom)	6500 K
Luminous Efficacy (rated) (Nom)	76 lm/W
Color rendering index (CRI)	82

Operating and Electrical	
Power Consumption	38.0 W
Lamp Current (Nom)	0.325 A
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Bulb Shape	T5 [16 mm (T5)]
Approval and Application	
Energy Efficiency Class	G
Mercury (Hg) Content (Nom)	1.2 mg
Energy Consumption kWh/1000 h	38 kWh
EPREL Registration Number	423560


Datasheet, 2023, April 14 data subject to change

MASTER TL5 High Output

Product Data	
Order product name	MASTER TL5 HO 39W/865 SLV/40
Full product name	MASTER TL5 HO 39W/865 SLV/40
Full product code	871150064387255
Order code	927928586555
Material Nr. (12NC)	927928586555


Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8711500643872
Numerator - Packs per outer box	40
EAN/UPC - Case	8711500868503

Dimensional drawing




Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL5 HO 39W/865	17 mm	849.0 mm	856.1 mm	853.7 mm	863.2 mm
SLV/40					


Photometric data

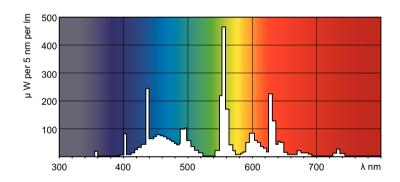

Spectral Power Distribution Colour - MASTER TL5 HO 39W/865 SLV/40

Lifetime

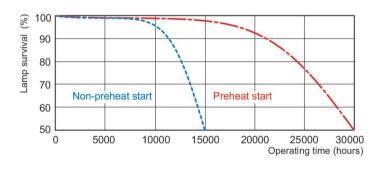




Life Expectancy Diagram - MASTER TL5 HO 39W/865 SLV/40

Life Expectancy Diagram - MASTER TL5 HO 39W/865 SLV/40

MASTER TL5 High Output

Lifetime

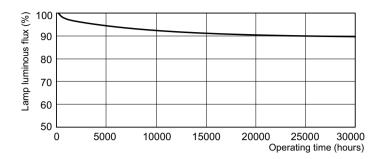

Lumen Maintenance Diagram - MASTER TL5 HO 39W/865 SLV/40



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.