



# MASTER TL5 High Output Xtra



## MASTER TL5 HO Xtra 54W/840 SLV/20

This TL5 lamp (tube diameter 16 mm) combines the advantages of a TL5 High Output lamp (TL5 HO lamps are optimized for installations requiring high light output and offer excellent lumen maintenance and color rendering) with a long and reliable lifetime. This results in extra-low maintenance costs and saves on expensive spot replacement. Main applications are places where lamp replacement costs and/or costs of disruption are high.

#### **Warnings and Safety**

- · Philips HF Xtreme gear ensures longest lifetime.
- · To achieve lifetimes as published for 100% operation, dimming below 30% should not be applied.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

#### **Product data**

General Information			
- Certerat information			
Cap-Base	G5 [G5]		
Flux measurement reference	Sphere		
Light Technical			
Color Code	840 [CCT of 4000K]		
Luminous Flux	4,500 lm		
Color Designation	Cool White (CW)		
Chromaticity Coordinate X (Nom)	0.38		
Chromaticity Coordinate Y (Nom)	0.38		
Correlated Color Temperature (Nom)	4000 K		
Luminous Efficacy (rated) (Nom)	83 lm/W		

Color rendering index (CRI)	80		
Cotor remaching mack (City)			
Operating and Electrical			
Power Consumption	53.8 W		
Lamp Current (Nom)	0.455 A		
Controls and Dimming			
Dimmable	Yes		
Mechanical and Housing			
Bulb Shape	T5 [16 mm (T5)]		

Datasheet, 2023, October 9 data subject to change


# **MASTER TL5 High Output Xtra**

Approval and Application	
Energy Efficiency Class	G
Mercury (Hg) Content (Max)	3 mg
Mercury (Hg) Content (Nom)	3.0 mg
Energy Consumption kWh/1000 h	54 kWh
EPREL Registration Number	423567
Product Data	

871150026352005	
927929284026	
927929284026	
1	
8711500263520	
20	
8711500263544	


Product Data	
Order product name	MASTER TL5 HO Xtra 54W/840 SLV/20
Full product name	MASTER TL5 HO Xtra 54W/840 SLV/20

## Dimensional drawing



Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL5 HO Xtra	17 mm	1,149.0 mm	1,156.1 mm	1,153.7 mm	1,163.2 mm
54W/840 SLV/20					


## Photometric data

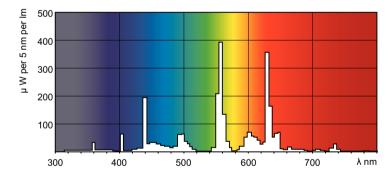


Spectral Power Distribution Colour - MASTER TL5 HO Xtra 54W/840 SLV/20


## **MASTER TL5 High Output Xtra**

## Lifetime

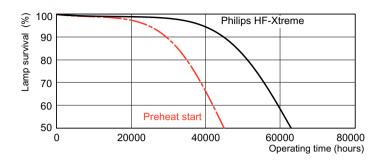

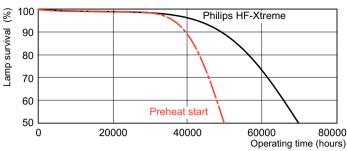

## Life Expectancy Diagram - MASTER TL5 HO Xtra 54W/840 SLV/20

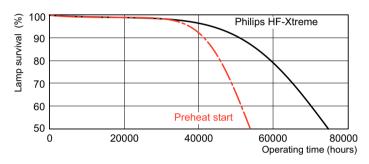

## Life Expectancy Diagram - MASTER TL5 HO Xtra 54W/840 SLV/20



Life Expectancy Diagram - MASTER TL5 HO Xtra 54W/840 SLV/20

Lumen Maintenance Diagram - MASTER TL5 HO Xtra 54W/840 SLV/20



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.