



TL5 Essential HO Super 80

TL5 Essential HO 54W/840 1SL/40

Low-pressure mercury discharge T5 lamp with tubular 16 mm envelope and high lumen output.

安全提示

- 20,000 hours lifetime (50% survival point, 3-hour cycle) with ENEC-compliant preheat ballast Lifetime performance may differ on non-ENEC-compliant ballasts


产品数据

一般信息	
底盖	G5 [G5]
功能	HO [High Output]
灯技术	
颜色代码	840 [CCT of 4000K]
光通量	5,000 lm
颜色名称	冷白色 (CW)
相关色温 (标称)	4000 K
光效 (额定) (标称)	87 lm/W
显色指数 (CRI)	82
操作和电气	
功耗	54 W
灯具电流 (标称)	0.460 A
控制和调光	
可调光	是

机械和外壳	
灯泡外形	T5 [16 毫米 (T5)]
审批和申请	
汞 (Hg) 含量 (标称)	2.0 mg
能耗 kWh/1000 h	54 kWh
产品数据	
订单产品名称	TL5 Essential HO 54W/840 1SL/40
完整的产品名称	TL5 Essential HO 54W/840 1SL/40
完整产品代码	692234199608500
订购代码	927929384053
材料编号 (12NC)	927929384053
计算器 - 每包数量	1
EAN/UPC - 产品/箱	6922341996085
计算器 - 每个外包装箱中的包数	40
EAN/UPC - 案例	6922341996542


TL5 Essential HO Super 80

二维绘图

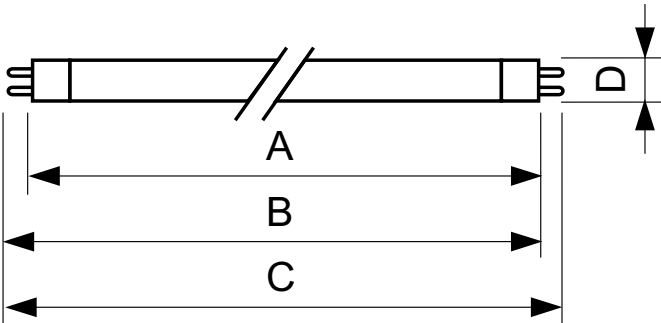

Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL5 Essential HO 54W/840	17.0 mm	1,149.0 mm	1,156.1 mm	1,153.7 mm	1,163.2 mm
1SL/40					

光度数据

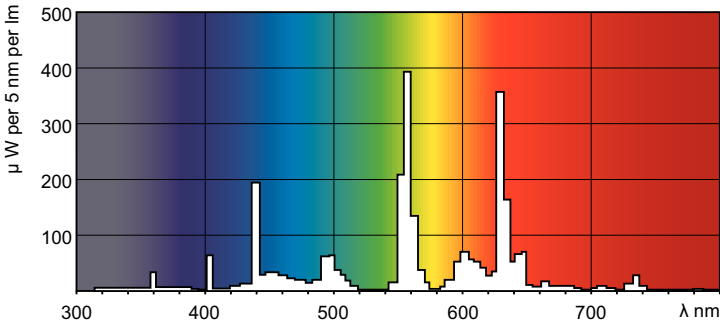

Spectral Power Distribution Colour - TL5 Essential HO 54W/840 1SL/40

