# Lighting

**PHILIPS** 



### MASTER PL-L Polar 4 Pin



#### MASTER PL-L Polar 36W/840/4P 1CT/25

MASTER PL-L Polar is a medium to high-wattage linear compact fluorescent lamp, typically used for lower-temperature applications such as outdoor lighting and cold storage. The original Philips-invented bridge technology guarantees optimum performance in the lower-temperature applications. It is designed for operation on electromagnetic as well as electronic HF control gear and is provided with a plug-in/pull-out lamp base.

#### Warnings and Safety

- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied control gear
- · Shorter lamp life when often switching and not well pre-heated electrodes
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

#### **Product data**


General Information		Correlated Color Temperature (Nom)	4000 K
Cap-Base	2G11	Luminous Efficacy (rated) (Nom)	81 lm/W
Flux measurement reference	Sphere	Color rendering index (CRI)	80
Life to 50% Failures (Nom)	15,000 hour(s)		
		Operating and Electrical	
Light Technical		Power Consumption	36.3 W
Color Code	840 [CCT of 4000K]	Lamp Current (Nom)	0.445 A
Luminous Flux	2,800 lm		
Color Designation	Cool White (CW)	Controls and Dimming	
Chromaticity Coordinate X (Nom)	0.38	Dimmable	Yes
Chromaticity Coordinate Y (Nom)	0.38		

#### MASTER PL-L Polar 4 Pin

G	
2 mg	
2.0 mg	
37 kWh	
423576	
MASTER PL-L Polar 36W/840/4P 1CT/25	
MASTER PL-L Polar 36W/840/4P 1CT/25	
-	

Full product code	871150026160140
Order code	927931084070
Material Nr. (12NC)	927931084070
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8711500261601
Numerator - Packs per outer box	25
EAN/UPC - Case	8711500261618


#### **Dimensional drawing**



## MASTER PL-L Polar 36W/840/4P 39.0 mm 18.0 mm 385 mm 410 mm 416.6 mm 1CT/25

D (max) D1 (max) A (max) B (max) C (max)

#### Photometric data

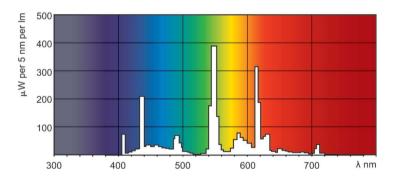

Spectral Power Distribution Colour - MASTER PL-L Polar 36W/840/4P 1CT/25



Product

© 2024 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2024, March 8 - data subject to change